

<b>Carts</b> Carretas/Plataformas Chariots . . . . .	<b>1467</b>
<b>Cylinder Handling</b> Equipo de Manipulación de Cilindros Equipement pour Manutention de Cylindres . . . . .	<b>1473</b>
<b>Drum Handling Equipment</b> Equipo para el Manejo de Barriles Equipement pour Manutention de Fûts . . . . .	<b>1441</b>
<b>Fork Truck Attachments</b> Fijaciones para Carretillas Elevadoras Fixations pour Chariots Elévateurs . . . . .	<b>1451</b>
<b>Gantry Cranes</b> Grúas Pórtico Portiques . . . . .	<b>1472</b>
<b>Hand Pallet Trucks</b> Transpaletas Transpalettes Manuels . . . . .	<b>1438</b>
<b>Hi-Rise Lift Trucks</b> Transpaletas para Alta Elevación Transpalettes à Haute Levée . . . . .	<b>1472</b>
<b>Hydraulic Elevating Lifts</b> Levantadores Hidráulicos Tables Elévatrices Hydrauliques . . . . .	<b>1466</b>
<b>Industrial Hand Trucks</b> Carros Manuales Diables Industriels . . . . .	<b>1468</b>
<b>Lifters/Tilters/Rotators</b> Levantadores/Basculantes/Rotadores Tables Elévatrices . . . . .	<b>1466</b>
<b>Loading Dock Accessories</b> Accesorios para el Muelle de Carga Accessoires pour Chargements de Quai . . . . .	<b>1453</b>
<b>Manual Hoists</b> Alazamiento de Cadena Manual Palans Manuels à Chaîne . . . . .	<b>1472</b>
<b>Protective Barriers</b> Barreras Protectoras Barrières de Protection . . . . .	<b>1461</b>
<b>Self-Dumping Hoppers</b> Contenedores Auto-Servidores Bennes Auto-Basculantes . . . . .	<b>1449</b>
<b>Steel Warehouse Ladders</b> Escaleras de Acero para el Almacén Echelles en Acier pour Entrepôts . . . . .	<b>1470</b>



# 20

# Hand Pallet Trucks *Transpaletas Transpalette Manuels*




- Entry rollers
- 4 zerks
- Adjustable pull/push rods
- Powder coated
- 3mm metal thickness frame
- 1 year pump/parts warranty
- Ergonomic handle
- Special order colors available with container load purchase
- Rodillos de Entrada
- 4 Graseras
- Barras de jale/empuje ajustables
- Pintura electrostática en polvo
- Marco de acero de 3mm de espesor
- 1 año de garantía en la bomba y en las partes
- Palanca de control con diseño ergonómico
- Otros colores están disponibles con la compra de un contenedor entero de apiladores
- Roulettes d'entrée
- 4 graisseurs Zerks
- Tiges réglables à pousser/tirer
- Enduit de poudre
- Cadre en métal de 3 mm d'épaisseur
- Garantie de 1 an sur la pompe/pièces
- Poignée ergonomique
- Couleurs offertes en commande spéciale à l'achat d'un conteneur.

## HJ5500

	Steer/Load Wheel Configuration	Capacity ▼	Truck Width	Fork Length
SYHJ-5510LP	Poly steer single poly low profile	3300lb	27"	48"
SYHJ-2772	Poly steer single poly load	4400lb	27"	72"
SYHJ-5501	Poly steer single poly load	5500lb	20½"	48"
SYHJ-5545	Poly steer single poly load	5500lb	21"	36"
SYHJ-5504	Poly steer single poly load	5500lb	21½"	48"
SYHJ-5520	Nylon steer single nylon load	5500lb	27"	48"
SYHJ-5500	Poly steer single poly load	5500lb	27"	48"
SYHJ-5505	Poly steer single poly load	5500lb	27"	36"
SYHJ-5510	Poly steer tandem poly load	5500lb	27"	48"
SYHJ-5535	Steel steer single steel load	5500lb	27"	48"

## Replacement Parts

	Description ▼		Description ▼
SYHJ-D220	Load wheel bearing	SYHJ-D116	Poly steer wheel
SYHJ-D220L	Low profile load wheel bearing	SYHJ-V	Pump kit
SYHJ-D229N	Nylon load wheel single	SYHJ-D229S	Steel load wheel single
SYHJ-D116N	Nylon steer wheel	SYHJ-D229LS	Steel low profile load wheel single
SYHJ-D229	Poly load wheel single	SYHJ-D116S	Steel steer wheel
SYHJ-D221	Poly load wheel tandem	SYHJ-D127	Steer wheel bearing
SYHJ-D229L	Poly low profile load wheel single	SYHJ-TUP	Touch up paint

 **CA PROP 65 WARNING:** Cancer/Reproductive Harm [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)

# Hand Pallet Trucks **Transpaletas** Transpalettes Manuels



- Entry rollers and exit rollers
- 2 zerks
- Adjustable pull/push rods
- Powder coated
- 4mm metal thickness frame
- 3 year pump - 1 year parts warranty
- Ergonomic handle
- Special order colors available with container load purchase

- Rodillos de Entrada
- 2 Graseras
- Barras de jale/empuje ajustables
- Pintura electrostática en polvo
- Marco de acero de 4mm de espesor
- 3 años de garantía en la bomba y 1 año de garantía en las partes
- Palanca de control con diseño ergonómico
- Otros colores están disponibles con la compra de un contenedor entero de apiladores

- Roulettes d'entrée
- 2 graisseurs zerks
- Tiges réglables à pousser/tirer
- Enduit de poudre
- Cadre en métal de 4 mm d'épaisseur enduit de poudre
- Garantie de 3 ans sur la pompe - 1 an sur les pièces
- Poignée ergonomique
- Couleurs offertes en commande spéciale à l'achat d'un conteneur.

## TSP5500

	Steer/Load Wheel Configuration	Capacity ▼	Truck Width	Fork Length
TSP5510LP	Poly steer single poly low profile	3300lb	27"	48"
TSP5550	Poly steer single poly "4" way	3300lb	33"	48"
TSP5540	Nylon steer single nylon load	5500lb	21"	48"
TSP5504	Poly steer single poly load	5500lb	21"	42"
TSP5501	Poly steer single poly load	5500lb	21½"	48"
TSP5515	Nylon steer single nylon load	5500lb	27"	36"
TSP5520	Nylon steer single nylon load	5500lb	27"	48"
TSP5525	Nylon steer single nylon load	5500lb	27"	42"
TSP5530	Nylon steer tandem nylon load	5500lb	27"	48"
TSP5500	Poly steer single poly load	5500lb	27"	48"
TSP5503	Poly steer single poly load	5500lb	27"	42"
TSP5505	Poly steer single poly load	5500lb	27"	36"
TSP5510	Poly steer tandem poly load	5500lb	27"	48"
TSP5535	Steel steer single steel load	5500lb	27"	48"
TSP6630	Nylon steer single nylon load	6600lb	27"	48"





## Replacement Parts


	Description ▼
TSP226	Load wheel bearing
TSP226L	Load wheel bearing low profile
TSP234N	Nylon load wheel single
TSP227N	Nylon load wheel tandem
TSP310N	Nylon steer wheel
TSP234	Poly load wheel single
TSP227	Poly load wheel tandem

	Description ▼
TSP234L	Poly low profile load wheel single
TSP310	Poly steer wheel
TSPKIT	Pump kit
TSP234S	Steel load wheel single
TSP310S	Steel steer wheel
TSP309	Steer wheel bearing
TSP-TUP	Touch up paint

**CA PROP 65 WARNING:** Cancer/Reproductive Harm [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)







# Hand Pallet Trucks *Transpaletas* *Transpalette*s *Manuels*


	▼	Steer/Load Wheel Configuration	Capacity	Fork Size (width x length)	Steel
	SYHPT-2000  3.3" (85mm) to 31.5" (800mm) Operating range	Hi - Lift	3300lb	27" x 43"	Painted
	SYHPT-2015	Nylon steer Tandem nylon load	4000lb	27" x 48"	Galvanized
	SYHPT-2010  Scale capacity 440lb (200kg) in 2.2lb (1kg) increments	Poly steer Tandem nylon load	4400lb	22½" x 45"	Painted
	▼ SYHJ-LBR-U  Load back rest 27" wide	<b>Fits</b> SYHJ-5500 TSP5500			

 CA PROP 65 WARNING: Cancer/Reproductive Harm [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)

# Drum Handling Equipment


Equipo para el Manejo de Barriles Equipement pour Manutention de Fûts


Chain Drum Lift	▼	Capacity	Drum Size	Description	
		SYDCL-550	550lb	Closed head 30gal steel drums with lip	<ul style="list-style-type: none"> <li>Vertically lift drum with overhead lifting device</li> <li>Use with closed head drums with lip</li> <li>Welded steel construction</li> <li>Powder coat finish</li> </ul>
		SYDCL-1000	1,000lb	55gal steel drums	
Chain Drum Lifter	▼	Capacity	Drum Size	Description	
		SYCDL-2000	2,000lb	Use with 33gal and 55gal	<ul style="list-style-type: none"> <li>Use with plastic, fiber or steel closed head drums with lip</li> <li>Grade 80 chain for OSHA and ANSI compliance</li> </ul>
Fork Truck Drum Carrier/Rotator	▼	Capacity	Drum Size	Description	
		SYDCR-205-8	800lb	55gal steel drums only	<ul style="list-style-type: none"> <li>Each unit is provided with a 15 foot chain to allow the drum to be rotated up to 360° from the operator's seat</li> <li>Fork pockets measure 7" wide by 2½" high</li> </ul>
		SYDCR-205-15	1,500lb	55gal steel drums only	
Fork Truck Drum Gripper	▼	Capacity	Drum Size	Description	
		SYDGS-55	800lb	30 and 55gal steel or plastic drums	Single drum
		SYDGD-55	1,500lb	30 and 55gal steel or plastic drums	Double drum
Specialty Drum Dolly	▼	Capacity	Drum Size	Description	
		SYOCTO-55	2,000lb	Use with 55gal steel drums	<ul style="list-style-type: none"> <li>Steel casters</li> <li>Cast iron (swivel) wheel type</li> <li>(8) 4" x 1½" wheel size</li> <li>Steel construction</li> <li>Painted finish</li> </ul>
			SYDRUM-HD	2,000lb	Use with 55gal steel drums


 CA PROP 65 WARNING: Cancer/Reproductive Harm [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)


# Drum Handling Equipment


Equipo para el Manejo de Barriles Equipement pour Manutention de Fûts

Fork Truck Drum Positioner	▼	Capacity	Drum Size	Description
		800lb	55gal steel drum only	<ul style="list-style-type: none"> <li>Allows driver to invert drums to the horizontal racking position and vice versa</li> <li>Positive latching system ensures safe handling of drums weighing up to 800lb</li> <li>Fork pockets measure 7½" wide by 2½" high usable on 20" centers</li> </ul>

Automatic Eagle Beak Drum Lifter	▼	Capacity	Drum Size	Description (width x length x height)
		1,000lb	Handles (1) steel, fiber or plastic drum	Overall size 28½" x 42⅝" x 31¼"

		2,000lb	30 and 55gal plastic, steel and fiber drums	Overall size 41¼" x 42⅝" x 31¼"
------------------------------------------------------------------------------------	--	---------	---------------------------------------------	---------------------------------

Fork Mounted Poly Drum Handlers	▼	Capacity	Drum Size	Description (width x length x height)
		800lb	Accommodates 55gal plastic drums	Overall size 28½" x 56¼" x 22⅝"

Fork Mounted Poly Drum Handlers	▼	Capacity	Drum Size	Description (width x length x height)
		1,100lb	Accommodates 30 and 55gal drums (closed head)	<ul style="list-style-type: none"> <li>Overall size 28½" x 48⅝" x 22⅝"</li> <li>Top grip design</li> </ul>

⚠ CA PROP 65 WARNING: Cancer/Reproductive Harm [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)

# Drum Handling Equipment


Equipo para el Manejo de Barriles Equipement pour Manutention de Fûts

## Low Profile Drum Caddies with Bung Nut Wrench Handle



	Capacity	Drum Size	Description
SYLO-DC-MR	1,000lb	Accommodates 30 or 55gal drums, LP tanks and 5gal pails	Mold-on rubber wheels
SYLO-DC-CI	1,200lb		Steel wheels
SYLO-DC-PU	1,200lb		Poly-on steel wheels

## Multi-Purpose Overhead Drum Lifter/Wrench



	Capacity	Drum Size	Description
SYPLD-800-M	800lb	Accommodates 30 and 55gal, plastic, steel and fiber drums with top lip	<ul style="list-style-type: none"> <li>Removable arms function as a bung nut wrench and removable drum ring wrench</li> <li>For use with closed-head drums only</li> </ul>

## Polyethylene Drum Rack



Polyethylene Drum Rack (PDR) captures spills, keeping your workplace clean and safe. All models tilt the drums slightly forward, allowing maximum drainage, optimizing use of chemicals while minimizing waste. The PDR's improve worker safety by keeping slippery chemicals and oils off the floor. Drum spill pallet comes standard with two and four drum rack systems.


## Estante de Barriles de Polietileno

Este estante captura derrames, manteniendo su lugar de trabajo más limpio y seguro. Todos los modelos se inclinan ligeramente hacia adelante lo que permite un máximo drenaje, optimiza el uso de químicos y, al mismo tiempo, minimiza residuos. El estante de barriles ha mejorado la seguridad de los trabajadores al prevenir derrames de químicos y aceites en el piso.

## Le polyéthylène Drum Rack

Le polyéthylène Drum Rack récupère les déversements, laissant votre environnement de travail propre et sécurisé. Tous les modèles permettant d'incliner quelque peu les fûts afin d'optimiser l'écoulement des produits chimiques tout en limitant les pertes. Le PDR augmente la sécurité des travailleurs en évitant aux produits chimiques glissants et aux huiles de se répandre sur le sol. Les palettes de retenue de fûts viennent de façon standard avec les étagères de fûts à deux ou quatre étages.

	Load Capacity	Containment Capacity	Description (width x length x height)	Net Weight	Drum System	
	SYPDR-2	1,500lb	66gal	53" x 53" x 44¾"	181lb	2 drum system
	SYPDR-4	3,000lb	66gal	53" x 53" x 77¾"	234lb	4 drum system

 CA PROP 65 WARNING: Cancer/Reproductive Harm [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)

# Drum Handling Equipment

Equipo para el Manejo de Barriles Equipement pour Manutention de Fûts

Stackable Drum Racks	Overall Size (width x depth x height)	Capacity	Net Weight	Description
 SYDRUM-RACK-3	71½" x 29⅞" x 12¾"	2,400lb	60lb	<ul style="list-style-type: none"> <li>• Feature four-way fork truck access</li> <li>• Not recommended for stacking more than four racks high</li> <li>• Steel construction with ¼" formed steel cradles</li> <li>• Bolt together assembly with hardware included</li> <li>• Works well with the Hydraulic Drum Stacker and the Drum Positioner</li> <li>• Painted finish</li> <li>• Holds (3) 55gal steel drums</li> </ul>
 SYDRUM-RACK-2	45½" x 29⅞" x 12¾"	1,600lb	95lb	<ul style="list-style-type: none"> <li>• Feature four-way fork truck access</li> <li>• Not recommended for stacking more than four racks high</li> <li>• Steel construction with ¼" formed steel cradles</li> <li>• Bolt together assembly with hardware included</li> <li>• Works well with the Hydraulic Drum Stacker and the Drum Positioner</li> <li>• Painted finish</li> <li>• Holds (2) 55gal steel drums</li> </ul>

## Drum Grippers



The Drum Gripper makes it easy to pick up one or two steel drums without leaving the seat of the fork truck. Simply slip the forks into the fork tubes and the Drum Gripper is ready to go. The knuckle gripping system is lowered around the drum, gripped tightly, and then lifted into the air. Drum is automatically released by lowering the forks. All models feature hinged folding design for storage. Models DGS-A and DGD-A feature adjustable-width arms for use with both 30gal and 55gal steel drums. Welded steel construction. Powder coat finish.

## Pinzas de Agarre para Barriles

Las pinzas para barriles facilita levantar uno de los barriles de acero sin tener que dejar el asiento del montacarga. Simplemente introduzca las horquillas en los tubos y el barril está listo para ser transportado. El sistema de pivote baja alrededor del barril agarrándolo muy fuerte y después lo levanta al aire. El barril es liberado automáticamente cuando se bajan las horquillas. Todos los modelos cuentan con un diseño articulado y plegable para un almacenamiento fácil. Los modelos DGS-A y DGD también cuentan con brazos ajustables de ancho para el uso con barriles de acero de 30 galones y 55 galones. Los barriles están contruidos de acero soldado con un acabado de polvo.

## Pince à Barils

La Pince à Fûts facilite la saisie d'un ou deux barils sans avoir à quitter le siège du chariot élévateur. Faites simplement glisser les fourches dans les tubes de fourches et votre pince à barils est prête à l'emploi. Le système de pivot de préhension est abaissé autour du baril, fortement accroché et ensuite soulevé dans les airs. Le baril est automatiquement libéré par l'abaissement de la fourche. Tous les modèles sont articulés et pliable pour faciliter leur rangement. Les modèles DGS-A et DGD-A ont tous deux les bras réglables pour une utilisation sur des barils en acier de 30 gallons et de 55 gallons. Construction en acier soudé. Revêtement final en poudre.

	Capacity	Drum Style	Fork Pocket Centers	Fork Pocket Size (width x height)	Overall Size (width x depth x height)	Net Weight
 SYDGD-55-D	2,000lb	55gal steel (2)	25⅞"	7⅞" x 2⅝"	46¼" x 43⅝" x 9⅞"	185lb
 SYDGS-55-D	1,500lb	55gal steel (1)	20¼"	7⅞" x 2⅞"	28" x 43⅞" x 7⅞"	115lb

⚠ CA PROP 65 WARNING: Cancer/Reproductive Harm [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)



# Drum Handling Equipment

## Equipo para el Manejo de Barriles Equipement pour Manutention de Fûts

### Drum Truck with Spring Assist

Hand truck designed for moving 55gal steel and plastic drums weighing up to 1,000lb. Special design features spring mechanism for easy use. Spring allows for easier tilting of fully-loaded drums. Removable hook bar includes built-in bung nut wrenches. Steel construction with powder coat yellow finish. 10" x 2 1/2" wheels standard.



### Carro Manual para Barriles

El carro manual está diseñado para el manejo y transporte de barriles de acero y plásticos de 55 galones que pesan hasta 1.000 libras. El diseño especial con mecanismo de resortes facilita su uso. Los resortes también facilita la inclinación de barriles completamente cargados. Las Barras de enganche extractables incluyen tuercas claves. Carros son construidos de acero soldado con acabado de polvo amarillo. 10 "x 2 1/2" ruedas estándar.

### Diabie pour Barils avec Ressorts

Diabie prévu pour la manutention de barils en acier, plastique et fibre de 55 gallon pesant jusqu'à 1000 pounds. design spécial avec mécanisme en ressorts pour faciliter l'utilisation. Les ressorts permettant une inclinaison plus facile lorsque le diabie est complètement chargé. Les bars de crochets amovibles incluent des écrous de bondes à clés. Construction en acier avec revêtement en poudre jaune. 10 "x 2 1/2" roues standards.

	Drum Type	Overall Size (width x length x height)	Wheel Type	Net Weight	
▼	SYDBT-SA-MR	Steel	23 1/16" x 14 5/16" x 60 5/8"	Mold-on rubber	103lb
	SYDBT-SA-PO	Steel	23 1/16" x 14 5/16" x 60 5/8"	Poly-on steel	110lb

### Drum Headers

Convert your closed head steel drums into storage containers with our Drum Deheaders. The SYDD-9 can be adjusted to open steel drums with different thicknesses. The blade is angled for maximum penetration and flattens the cut edge so there are no sharp or jagged edges. Replacement blades available, model SYDDB-1. Quickly remove the head of a steel drum in less than 30 seconds with our new Express-Open Drum Deheader! Unique design, model SYD-HEAD-1, is similar to a household can-opener and is very easy to use. Comfortable handle configuration allows for maximum operator comfort. Includes vice-grip style mechanism for securely attaching unit to drum. A standard 1/2" ratchet drive (manual or pneumatic) must be used to operate the deheader (ratchet drive not included). Inside cutting blade does not leave a sharp edge on the drum. Replacement blades available separately, model SYD-HEAD-B. Both styles open 30 and 55gal steel drums and 5gal pails.

### Cabeceras de Barriles

Convierta sus barriles de acero cerrados en un recipiente de almacenamiento con nuestro abridor de barriles. El SYDD-9 puede ajustarse para abrir barriles de diferente grosor y densidad. La cuchilla tiene un ángulo de penetración máxima que aplanla la orilla del corte para que no haya bordes afilados o dentados. El modelo SYDDB-1 de Cuchillas de repuesto está disponible. ¡Retire rápidamente la cabeza del barril de acero en menos de 30 segundos con nuestro Abridor de Barriles Express! El modelo SYD-HEAD-1, con su diseño único, es comparable al abrelatas de cualquier hogar y es muy fácil de usar. Tiene una manija cómoda que ofrece comodidad máxima durante el su uso. Incluye un mecanismo de agarre [ara conectar la unidad al barril. Una trinquete estándar de 1/2" (manual o neumático) debe ser utilizado para operar el abridor (la unidad de trinquete no está incluido). Cuchillas de repuesto está disponibles aparte (modelo SYD-HEAD-B). Ambos estilos abren barriles de acero de 30 & 50 galones o hasta cubetas de 5 galones.

### Ouvre Barils

Permet de convertir vos barils en acier fermé, en récipient de stockage. Le SYDD-9 peut être utilisé de façon à ouvrir des barils en acier de différentes épaisseurs. La lame est inclinée pour une pénétration maximale et l'arête de coupe est aplatit de sorte qu'il n'y ait pas de bords tranchants ou dentelés. Lames de rechange disponibles, modèle SYDDB-1. Enlève rapidement la tête d'un fût en acier en moins de 30 secondes avec notre nouveau Deheader Express-Open Drum! Le modèle SYD-HEAD avec son design unique est comparable à un ouvre boîte traditionnel, il est très facile d'utilisation. Poignée confortable permettant un confort d'utilisation maximum pour l'utilisateur. Comprend le mécanisme de style vice-grip (adhérent) pour bien fixer l'appareil au fût. Une clé à cliquet standard de 1/2" (manuel ou pneumatique) doit être utilisé pour faire fonctionner le deheader (clé à cliquet non incluse). Les lames intérieures ne laissent pas de bords coupants sur le baril. Lames de rechange disponibles séparément, Modèle SYD-HEAD-B. Chaque modèle ouvre des barils de 30 et 55 gallon et des seaux de 5 gallon.



SYDD-9



SYD-HEAD-1



SYD-HEAD-B  
Replacement blade  
for SYD-HEAD-1



SYDDB-1  
Replacement blade  
for SYDD-9



SYD-HEAD-GK  
Replacement gear  
bushing kit for  
SYD-HEAD-1

⚠ CA PROP 65 WARNING: Cancer/Reproductive Harm [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)

# Drum Handling Equipment

Equipo para el Manejo de Barriles Equipement pour Manutention de Fûts

## Drum Jacks

These Drum Jacks are the perfect solution to any of your drum transporting needs. Compact design allows for maximum maneuverability in restrictive areas. All steel construction.

## Gatos para Barriles

Estos gatos son una solución perfecta para cualquier necesidad de transporte de barriles. El diseño compacto permite máxima movilidad en áreas que de lo contrario fueran restrictivas. Toda una estructura de acero.

## Crics pour Barils

Ces Diabes pour Barils sont la solution parfaite pour n'importe lequel de vos besoins de transport de barils. Un design compact pour une maniabilité maximale dans les zones restrictives. Diable en acier.

### SYDRUM-55-36

Accepts 55gal steel and fiber drums with a top lip. The front rigid wheels are 6" x 1½", while the rear swivel casters are 3" x 1½".

### SYDRUM-55-36

Acepta barriles de acero y fibra con tapadera de ambos pesos, 55 galones. Las ruedas rígidas delanteras son de 6" x 1½" mientras que los rodillos traseros son giratorios y son de 3" x 1½".

### SYDRUM-55-36

Permet le transport de barils, en acier et en fibres de 55 gallon. Les roues avant sont fixes 6" x 1½", tandis que les roulettes arrière sont pivotantes, 3" x 1½".

### SYDRUM-55S

Has a unique grapple to hold 55gal drums securely into the steel saddle prior to lifting it vertically. The drum is held in this position during transit, enabling open drums to be handled without spillage.

### SYDRUM-55S

Tiene un diseño único para agarrar barriles de 55 galones de forma segura hacia la silla de acero antes de levantarlo verticalmente. El barril se mantiene en esta posición durante el tránsito, lo que permite abrir los tambores para ser manipulados sin derrames.

### SYDRUM-55S

Possède un grappin permettant de déplacer des barils de 55 gallon sur la selle en acier avant de pouvoir les élever verticalement. Le baril est maintenu dans cette position pendant le transport, permettant aux barils ouverts d'être manutentionné sans déversements.

### SYDRUM-55FP




Has an adjustable beak design which allows it to grab 30 and 55gal steel, plastic or fiber drums. Drums can easily be placed or removed from pallets, spill containers and scales. Available with built-in scale feature, see below.

### SYDRUM-55FP

El diseño incluye un pico ajustable que le permite agarrar barriles de acero, plástico o fibra de 30 & 50 galones. Los barriles pueden ser colocados y recogidos fácilmente de cualquier plataforma, pesa y recipiente. Están disponibles con pesas o escalas incorporadas, consulte la información a continuación.

### SYDRUM-55FP


Possède un bec réglable lui permettant d'attraper des barils en acier, en plastique ou en fibre de 30 & 55 gals. Les barils peuvent facilement être mis en place ou retiré des palettes, des bacs de rétention et des échelles. Disponible avec fonction intégrée de l'échelle, voir ci-dessous.

	▼	Capacity	Overall Size (width x length)	Lift Height	Beak Service Range	Net Weight
	SYDRUM-55-36	500lb	30½" x 27 13⁄16"	18"	33" to 52"	161lb
	SYDRUM-55-FP	1,000lb	41¾" x 41¼"	20"	24" to 58"	379lb
	SYDRUM-55-S	660lb	28½" x 41¼"	4"		152lb

⚠ CA PROP 65 WARNING: Cancer/Reproductive Harm [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)

# Drum Handling Equipment

Equipo para el Manejo de Barriles Equipement pour Manutention de Fûts

Barrel/Drum Trucks	▼	Capacity	Overall Size (width x length)	Wheel Type	Net Weight	Description
	SYDBT-1200	800lb	29" x 60"	Rubber-on steel	97lb	<ul style="list-style-type: none"> <li>The Barrel/Drum Truck handles 30 and 55gal steel and fiber drums that are 24" to 48" high</li> <li>Adjustable chime hook helps to secure the drum</li> <li>Wheels measure 12" x 2" and are available in rubber-on-steel or polyurethane-on-steel</li> </ul>
	SYDBT-1200-P	800lb	29" x 60"	Poly-on steel	102lb	
	SYDBT-RED	800lb	24¼" x 60¼"	Polyurethane	48lb	

## Economy Rotating Drum Carts


Easy to operate. Includes two rigid and two swivel casters. Handle is not included and must be purchased separately. Handle includes built-in drum tipper and bung nut wrenches as a bonus. Handle includes built-in drum tipper to assist with liquid drainage. Rugged steel construction with painted finish. Assembly required.

## Carros Giratorios de Barril Economy

Fácil de manejar. Incluyen 2 rodillos giratorios y dos ruedas firmes. El mando no viene incluido--debe ser comprado aparte. El mando incluye una función para voltear el barril y una tuerca como un bono adicional. El mando ayuda con el drenaje de líquido. Fabricado con un acabado de pintura. Es necesario montarlo.

## Chariots Economiques Rotatifs pour Barils

Facile à utiliser. Comprend deux roulettes fixes et deux roulettes pivotantes. Les poignées ne sont PAS incluses - doivent être acheté séparément. Les poignées comprennent une benne basculante et des écrous de bondes à clés en bonus. Les poignées comprennent une benne basculante pour faciliter le drainage des liquides. Construction robuste en acier et finitions peintures. Montage nécessaire.

▼	Capacity	Wheel Size	Wheel Type	Net Weight	
	SYRDC-60-5-PO	800lb	5"	Polyolefin	46lb
	SYRDC-60-5-SS	800lb	5"	Steel	46lb

## Steel Drum Funnel (with self closing lid)


Allows for quickly filling 55gal drums with 2" plug. Includes 8¾" long brass flame arrestor safety. Hinged lid with fusible link automatically closes at 155°. Lid latch may be locked for security (lock not included). Fits 2" NPS threaded drum bung. Gasket included for tight seal. Steel construction with painted finish.

## Embudo de Barril de Acero (con cierre automático)

Permite llenar el barril de 55 galones más rápido con tapó de 2". Incluye 8¾" aseguradores. La tapa articulada se cierra automáticamente a 155°. La tapa de cierre tiene la capacidad de cierre con candado (candado no incluido). Convenientemente cave en barriles de 2" NPS. El empaque es incluido para un selladura más apretada. Fabricado con acabado de pintura.

## Entonnoir pour Barils en Acier

Permet le remplissage rapide des barils de 55 gallons avec 2" bouchon. Inclut 8¾" pare-flamme en laiton. Couvercle à charnière se ferme automatiquement à 155°. Le loquet du couvercle peut éventuellement être verrouillé par sécurité (cadenas non inclus). Convient pour bondes de barils de 2" NPS. Joint inclus pour l'étanchéité. Matériaux en acier et finition peinture.

▼	Construction	Drum Size	Fits Drum Bungs	Net Weight	
	SYDF-S	Steel	55gal	2"	10lb

⚠ CA PROP 65 WARNING: Cancer/Reproductive Harm www.p65warnings.ca.gov

# Drum Handling Equipment

Equipo para el Manejo de Barriles Equipement pour Manutention de Fûts

Tilting Drum Rings	▼	Capacity	Acceptable Drum Types	Fork Opening (width x height)	Net Weight	Description
		SYTDR-30 1,200lb	30gal steel	5¼" x 2⅞"	22lb	<ul style="list-style-type: none"> <li>• Transport up to 1,200lb with your fork truck and the Tilting Drum Ring</li> <li>• Pivoting fork pockets allow you to manually rotate drum to dispense light materials</li> <li>• To use, slip the band over the drum and tighten the lock to secure around the belly of the drum</li> <li>• Steel construction</li> <li>• Powder coat finish</li> </ul>
		SYTDR-55 1,200lb	55gal steel	5¼" x 2⅞"	24lb	



Capacity is based on full drums / Half-full drums are rated at 600lb

Drum Vent & Indicator	▼	Vent	Displacement	Net Weight	Description
		SYVENT-H Horizontal	Fits 2" openings	1lb	<ul style="list-style-type: none"> <li>• Available for use with drums in horizontal or vertical positions</li> <li>• Use with standard 2" drum plug openings</li> <li>• Each vent includes a flash arrestor for safety</li> </ul>



		SYVENT-V Vertical	Fits 2" openings	2lb	
--	--	-------------------	------------------	-----	--



⚠ CA PROP 65 WARNING: Cancer/Reproductive Harm [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)

# Self-Dumping Hoppers Contenedores Auto-Servidores Bennes Auto-Basculantes

## Hopper with Bumper Release

- Includes front bumper release for easy dumping and a manual pull cable to dump from fork truck seat
- 68° rotation returns to upright position automatically
- Full-length fork tubes
- Leak proof design available



## Contenedor de Descarga con Liberador Manual

- Incluye la liberación parachoques delantero para facilitar la descarga y un cable manual desde el asiento del camión
- La rotación de 68° regresa a la posición vertical automáticamente
- Tubos de Horquillas completos
- Diseño "contra derrames" disponible--llame para más detalles

## Benne à Libération par l'Avant

- Benne à libération par l'avant pour un déchargement facilité grâce au déclencheur manuel situé au niveau du siège du conducteur.
- Rotation jusqu'à 68° retour automatique à la position initiale
- Tubes de fourches de longueur maximale.
- Modèle étanche disponible. Veuillez nous appeler pour plus de détails.

▼	Volume	Capacity	Gauge of Steel	Overall Size (width x length x height)	Fork Pocket Centers
SYD-33-HD	1/3yd <sup>3</sup>	6,000lb	8	26" x 51 <sup>7</sup> / <sub>8</sub> " x 38 <sup>1</sup> / <sub>16</sub> "	18"
SYD-50-HD	1/2yd <sup>3</sup>	6,000lb	8	33 <sup>3</sup> / <sub>16</sub> " x 51 <sup>7</sup> / <sub>8</sub> " x 38 <sup>1</sup> / <sub>16</sub> "	18"
SYD-75-HD	3/4yd <sup>3</sup>	6,000lb	8	31 <sup>3</sup> / <sub>16</sub> " x 61 <sup>1</sup> / <sub>8</sub> " x 42 <sup>3</sup> / <sub>4</sub> "	18"
SYD-100-HD	1yd <sup>3</sup>	6,000lb	8	41 <sup>3</sup> / <sub>16</sub> " x 61 <sup>1</sup> / <sub>8</sub> " x 42 <sup>3</sup> / <sub>4</sub> "	18"
SYD-100-LD	1yd <sup>3</sup>	2,000lb	12	41 <sup>1</sup> / <sub>16</sub> " x 61 <sup>1</sup> / <sub>8</sub> " x 42 <sup>1</sup> / <sub>16</sub> "	18"
SYD-150-HD	1 1/2yd <sup>3</sup>	6,000lb	8	43 <sup>3</sup> / <sub>16</sub> " x 68 <sup>3</sup> / <sub>8</sub> " x 51 <sup>1</sup> / <sub>16</sub> "	28"
SYD-200-HD	2yd <sup>3</sup>	6,000lb	8	56 <sup>3</sup> / <sub>16</sub> " x 68 <sup>5</sup> / <sub>16</sub> " x 51 <sup>1</sup> / <sub>16</sub> "	28"
SYD-200-LD	2yd <sup>3</sup>	2,000lb	12	56 <sup>1</sup> / <sub>16</sub> " x 68 <sup>5</sup> / <sub>16</sub> " x 51 <sup>1</sup> / <sub>16</sub> "	28"
SYD-200-MD	2yd <sup>3</sup>	4,000lb	10	56 <sup>5</sup> / <sub>8</sub> " x 68 <sup>5</sup> / <sub>16</sub> " x 51 <sup>1</sup> / <sub>16</sub> "	28"
SYD-250-HD	2 1/2yd <sup>3</sup>	6,000lb	8	69 <sup>9</sup> / <sub>16</sub> " x 68 <sup>3</sup> / <sub>8</sub> " x 51 <sup>3</sup> / <sub>4</sub> "	28"
SYD-300-HD	3yd <sup>3</sup>	6,000lb	8	81 <sup>3</sup> / <sub>4</sub> " x 68 <sup>5</sup> / <sub>8</sub> " x 51 <sup>1</sup> / <sub>16</sub> "	28"
SYD-300-LD	3yd <sup>3</sup>	2,000lb	12	81 <sup>3</sup> / <sub>4</sub> " x 68 <sup>5</sup> / <sub>8</sub> " x 51 <sup>1</sup> / <sub>16</sub> "	28"
SYD-300-MD	3yd <sup>3</sup>	4,000lb	10	81 <sup>3</sup> / <sub>4</sub> " x 68 <sup>5</sup> / <sub>8</sub> " x 51 <sup>1</sup> / <sub>16</sub> "	28"

## Low Profile Hopper

- Full 90° dump angle
- Manual pull cable to dump from fork truck seat
- Half-length fork tubes
- Leak proof design available



## Contenedor de Perfil Bajo

- Se voltea a un ángulo de 90°
- Tira de cable manual para descargar del camión desde el asiento
- Longitud Media de los tubos para Horquillas
- Diseño "contra derrames" disponible--llame para más detalles

## Benne Basse

- Angle plein de 90° pour la décharge
- Déclencheur manuel situé au niveau du siège du conducteur
- Tubes de fourches de moyenne longueur
- Modèle étanche disponible. Veuillez nous appeler pour plus de détails.

▼	Volume	Capacity	Gauge of Steel	Overall Size (width x length x height)	Fork Pocket Centers
SYH-25-HD	1/4yd <sup>3</sup>	6,000lb	8	27" x 46 <sup>3</sup> / <sub>16</sub> " x 21 <sup>3</sup> / <sub>8</sub> "	11 <sup>5</sup> / <sub>8</sub> "
SYH-25-LD	1/4yd <sup>3</sup>	2,000lb	12	27" x 46 <sup>1</sup> / <sub>8</sub> " x 21 <sup>3</sup> / <sub>8</sub> "	11 <sup>5</sup> / <sub>8</sub> "
SYH-25-MD	1/4yd <sup>3</sup>	4,000lb	10	27" x 46 <sup>3</sup> / <sub>16</sub> " x 21 <sup>3</sup> / <sub>8</sub> "	11 <sup>5</sup> / <sub>8</sub> "
SYH-50-HD	1/2yd <sup>3</sup>	6,000lb	8	27" x 51 <sup>1</sup> / <sub>4</sub> " x 28 <sup>3</sup> / <sub>16</sub> "	11 <sup>5</sup> / <sub>8</sub> "
SYH-50-LD	1/2yd <sup>3</sup>	2,000lb	12	27" x 51 <sup>3</sup> / <sub>16</sub> " x 28 <sup>1</sup> / <sub>8</sub> "	11 <sup>5</sup> / <sub>8</sub> "
SYH-50-MD	1/2yd <sup>3</sup>	4,000lb	10	27" x 51 <sup>3</sup> / <sub>16</sub> " x 28 <sup>3</sup> / <sub>16</sub> "	11 <sup>5</sup> / <sub>8</sub> "
SYH-100-HD	1yd <sup>3</sup>	6,000lb	8	51" x 51 <sup>1</sup> / <sub>4</sub> " x 28 <sup>3</sup> / <sub>16</sub> "	21 <sup>5</sup> / <sub>8</sub> "
SYH-100-LD	1yd <sup>3</sup>	2,000lb	12	51" x 51 <sup>1</sup> / <sub>16</sub> " x 28 <sup>1</sup> / <sub>8</sub> "	21 <sup>5</sup> / <sub>8</sub> "
SYH-100-MD	1yd <sup>3</sup>	4,000lb	10	51" x 51 <sup>1</sup> / <sub>16</sub> " x 28 <sup>1</sup> / <sub>8</sub> "	21 <sup>5</sup> / <sub>8</sub> "
SYH-150-HD	1 1/2yd <sup>3</sup>	6,000lb	8	51" x 56 <sup>1</sup> / <sub>2</sub> " x 38 <sup>1</sup> / <sub>16</sub> "	21 <sup>5</sup> / <sub>8</sub> "
SYH-150-LD	1 1/2yd <sup>3</sup>	2,000lb	12	51" x 56 <sup>1</sup> / <sub>2</sub> " x 38 <sup>5</sup> / <sub>8</sub> "	21 <sup>5</sup> / <sub>8</sub> "
SYH-150-MD	1 1/2yd <sup>3</sup>	4,000lb	10	51" x 56 <sup>1</sup> / <sub>16</sub> " x 38 <sup>5</sup> / <sub>8</sub> "	21 <sup>5</sup> / <sub>8</sub> "

CA PROP 65 WARNING: Cancer/Reproductive Harm www.p65warnings.ca.gov

# Self-Dumping Hoppers Contenedores Auto-Servidores Benne Auto-Basculantes

## Heavy Duty Poly Lids for Self-Dumping Hoppers


- Factory or field install without drilling
- Made from new heavy-duty black poly material
- Ribbed design for strength and aesthetics
- Features prop and lock (padlock not included)
- Available on H or D style hoppers
- Hopper not included

## Tapas de Poliuretano Pesadas para Contenedores Auto-Servidores


- Instalación para fábricas o en el campo que no requiere ninguna perforación
- Fabricadas de material reciclado de poliuretano negro
- Diseño acanalado para resistencia y estética
- Capacidad de cierre (candado no está incluido)
- Disponibles para contenedores de estilo H o D
- Contenedores no viene incluidos

## Couvercles en Polyuréthane pour Travaux lourds pour Benne Auto-Basculante

- Installer en usine ou sur le terrain, ne nécessite pas de perçage
- Fabriqué à partir de matériaux lourds en polyuréthane noir recyclés
- Conception à nervures pour la robustesse et l'esthétisme
- Possibilité de verrouiller. (Cadenas non inclus)
- Modèles de benne en H ou D disponibles
- Benne non incluse



Style H



Style D

▼	Volume	For use with Hopper Style
SYPLID-D-33	1/3yd <sup>3</sup>	D
SYPLID-D-50	1/2yd <sup>3</sup>	D
SYPLID-D-75	3/4yd <sup>3</sup>	D
SYPLID-D-100	1yd <sup>3</sup>	D
SYPLID-D-150	1 1/2yd <sup>3</sup>	D
SYPLID-D-200	2yd <sup>3</sup>	D

▼	Volume	For use with Hopper Style
SYPLID-D-250	2 1/2yd <sup>3</sup>	D
SYPLID-D-300	3yd <sup>3</sup>	D
SYPLID-H-25	1/4yd <sup>3</sup>	H
SYPLID-H-50	1/2yd <sup>3</sup>	H
SYPLID-H-100	1yd <sup>3</sup>	H
SYPLID-H-150	1 1/2yd <sup>3</sup>	H

Low Profile Parts Hopper	▼	Capacity	Volume	Overall Size (width x depth x height)	Description
	SYHOP-LP	2,000lb	1/2yd <sup>3</sup>	48 7/16" x 54 1/16" x 34"	<ul style="list-style-type: none"> <li>• Designed to function as a parts hopper that may be dumped with the assistance of a fork truck</li> <li>• 4" x 2" phenolic casters</li> <li>• Removable push handle</li> <li>• Welded steel construction</li> </ul>








Portable Steel Hoppers	▼	Capacity	Volume	Overall Size (width x depth x height)	Description
	SYP-HOP-0.5	2,000lb	1/2yd <sup>3</sup>	34 13/16" x 53 7/8" x 37 3/16"	<ul style="list-style-type: none"> <li>• Make handling waste and bulk material more convenient</li> </ul>
	SYP-HOP-1	2,000lb	1yd <sup>3</sup>	58 13/16" x 53 7/8" x 37 1/8"	<ul style="list-style-type: none"> <li>• 7" x 2" fork pockets on 21 5/8" centers (11 7/8" fork pocket center on models SYP-HOP-0.5)</li> </ul>
	SYP-HOP-1.5	2,000lb	1 1/2yd <sup>3</sup>	58 13/16" x 58 15/16" x 47 5/8"	<ul style="list-style-type: none"> <li>• Unit not designed for use as a self-dumping hopper</li> <li>• 8" x 2" phenolic casters</li> <li>• Includes non-removable push handle</li> </ul>



⚠ CA PROP 65 WARNING: Cancer/Reproductive Harm www.p65warnings.ca.gov

# Fork Truck Attachments

Fijaciones para Carretillas Elevadoras Fixations pour Chariots Elévateurs

Pallet Dumper/Retainer	▼	Capacity	Volume	Size (width x height)	Description
	SYPAL-D/R	2,000lb		7½" x 2½"	<ul style="list-style-type: none"> <li>Fork truck mounted</li> <li>Designed to dump pallets with use of fork truck</li> </ul>
				Usable fork pockets 52" overall fork length 33" overall width	
Fork Mounted Front Loader	▼	Capacity	Volume	Size (width x depth x height)	Description
	SYFL-4000	4,000lb	1½yd³	69¾" x 63½" x 22¼"	<ul style="list-style-type: none"> <li>Dump angle 90°</li> </ul>
Hoisting Hook - Double Fork Style	▼	Capacity	Volume	Size (width x height)	Description
	SYD-FORK-4	4,000lb		6¾" x 2½" fork pocket	<ul style="list-style-type: none"> <li>Forks not included</li> <li>Includes swivel hook with safety latch</li> <li>Includes safety chain and T-locks for securing unit to fork truck</li> </ul>
	SYD-FORK-10	10,000lb		6½" x 3½" overall size	
Hook Plate	▼	Capacity	Volume	Size (height x width)	Description
	SYLM-HP4	4,000lb		6" without hook x 24"	<ul style="list-style-type: none"> <li>Forks not included</li> <li>Includes safety restraint for securing unit to fork truck</li> <li>Includes swivel lifting hook with safety latch</li> </ul>
	SYLM-HP6	6,000lb		6" without hook x 24"	
Work Platform	▼	Capacity	Size (width x length x height)	Description	
	SYWP-3636	1,000lb	36" x 36" x 60" back	<ul style="list-style-type: none"> <li>84" high backing needed for California OSHA requirements, call for details</li> <li>Includes safety chain for securing unit to fork truck</li> <li>Double-locking gate</li> <li>4" high toeboard</li> <li>Treatplate surface for added safety</li> <li>Safety tine lock standard</li> <li>7¾" fork pockets standard</li> </ul>	
	SYWP-3648	1,000lb	36" x 48" x 60" back		
	SYWP-4848	1,000lb	48" x 48" x 60" back		
	SYWP-CA	1,000lb	Work platform caster kit 4" x 2"		

⚠ CA PROP 65 WARNING: Cancer/Reproductive Harm [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)



# Fork Truck Attachments

Fijaciones para Carretillas Elevadoras Fixations pour Chariots Elévateurs

## Forktruck Towball & Pintle Hook



	Capacity	Fork Length	Length to Center of Ball	Description
SYHOOK-BASE-32	4,000lb	36"	32"	<ul style="list-style-type: none"> <li>Converts a fork truck into a tow truck for moving trailers and other portable equipment</li> </ul>
SYHOOK-BASE-38	4,000lb	42"	38"	<ul style="list-style-type: none"> <li>Simple design slides onto forks and secures into place with safety pins</li> </ul>
SYHOOK-BASE-44	4,000lb	48"	44"	<ul style="list-style-type: none"> <li>Optional pintle, ball and hook available</li> <li>Welded steel construction with powder coat blue finish</li> </ul>

## Pintle



	Capacity	Jaw Opening
SYPINTLE	2,000lb vertical 10,000lb trailer	1¾"

## Fold Down Fork Truck Work Platform



	Capacity	Size (width x length)	Description
SYWP-3737-FD	600lb	37" x 37"	<ul style="list-style-type: none"> <li>Industry-best powder coat safety yellow finish</li> <li>Two gates for platform access on each side</li> <li>Fork truck tine lock secures work platform to forks of fork truck</li> <li>4" high toe-boards with 38" high handrail and 23½" high midrail</li> <li>70" high expanded metal back to protect user from moving forklift parts</li> <li>Operators safety instruction sign in English, Spanish and French</li> </ul>

## Fork Truck Boom




	Capacity	Size	Description
SYLM-OBT-4-24	4,000lb	24" fork center	<ul style="list-style-type: none"> <li>Features fork pockets with safety chain and friction locking screws to attach boom to fork truck</li> <li>Each unit includes one rigid and one swivel lifting hook</li> <li>Telescopic design offers variable reach between 36" and 144"</li> <li>Robotically welded construction for precision and durability</li> </ul>
SYLM-OBT-6-24	6,000lb	24" fork center	
SYLM-OBT-8-24	8,000lb	24" fork center	


CA PROP 65 WARNING: Cancer/Reproductive Harm [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)





# Loading Dock Accessories


Accesorios para el Muelle de Carga Accessoires pour Chargements de Quai

Aluminum Truck Wheel Riser ▼	Capacity	Size (width x height x length)	Description
	SYATWR-18-6-48	30,000lb per pair	18" x 6" x 48" overall (30" level length)
	SYATWR-18-8-54	30,000lb per pair	18" x 8" x 54" overall (30" level length)
	SYATWR-24-6-48	30,000lb per pair	24" x 6" x 48" overall (30" level length)
	SYATWR-24-12-72	30,000lb per pair	24" x 12" x 72" overall (36" level length)

Aluminum Dockboard with Welded Aluminum Curbs ▼	Capacity	Size (width x length)	Description
	SYBTA-05006036	5,000lb	60" x 36"
	SYBTA-05006048	5,000lb	60" x 48"
	SYBTA-12006048	12,000lb	60" x 48"
	SYBTA-15006048	15,000lb	60" x 48"
	SYBTA-15006060	15,000lb	60" x 60"
	SYBTA-15007260	15,000lb	72" x 60"

Aluminum Dockboard with Bolt-On Steel Curbs ▼	Capacity	Size (width x length)	Description
	SYTAS-10-6048	10,000lb	60" x 48"
	SYTAS-10-6060	10,000lb	60" x 60"
	SYTAS-15-6036	15,000lb	60" x 36"
	SYTAS-15-6048	15,000lb	60" x 48"
	SYTAS-20-6036	20,000lb	60" x 36"







Aluminum Dockplate ▼	Capacity	Size (width x length)	Description
	SYE-3636	2,500lb	36" x 36"
	SYE-3648	1,900lb	36" x 48"
	SYE-4836	3,500lb	48" x 36"
	SYE-4848	2,600lb	48" x 48"
	SYE-6036	4,100lb	60" x 36"
	SYEH-4836	5,300lb	48" x 36"
	SYEH-6030	7,800lb	60" x 30"
	SYEH-7236	7,800lb	72" x 36"


Steel Dockboard with Welded Steel Curbs ▼	Capacity	Size (width x length)	Description
	SYTS-10-6048	10,000lb	60" x 48"
	SYTS-10-6060	10,000lb	60" x 60"
	SYTS-10-7248	10,000lb	72" x 48"
	SYTS-15-6060	15,000lb	60" x 60"
	SYTS-15-7248	15,000lb	72" x 48"
	SYTS-20-7260	20,000lb	72" x 60"

⚠ CA PROP 65 WARNING: Cancer/Reproductive Harm [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)

# Loading Dock Accessories

Accesorios para el Muelle de Carga Accessoires pour Chargements de Quai

Cargo Bar	▼	Size	Description	
	SYCB-7	89"-104" service range	<ul style="list-style-type: none"> <li>Aluminum one-piece design</li> <li>Manual ratchet for length adjustments</li> <li>Rubber end pads</li> </ul>	
	SYCBH-32	87"-116" service range	<ul style="list-style-type: none"> <li>Steel one-piece design with hoops</li> <li>Hoops increase effective cargo holding area</li> <li>Rubber end pads</li> </ul>	
	SYCL-16	87"-119" service range	<ul style="list-style-type: none"> <li>Steel one-piece without hoops</li> <li>Rubber end pads</li> <li>Length adjusted with manual ratchet</li> </ul>	
	SYCL-17	88"-116" service range	<ul style="list-style-type: none"> <li>Steel two-piece (folding design) for storage inside cab</li> <li>Rubber end pads</li> <li>Length adjusted with manual ratchet</li> </ul>	
Edge-of-Dock Leveler	▼	Capacity	Size	Description
	SYFM-2072	20,000lb	72"w usable	<ul style="list-style-type: none"> <li>Manual operation</li> <li>+/-5" service range</li> <li>Includes leveler, rubber bumpers and steel bumper boxes</li> <li>Requires steel dock edge for proper installation</li> </ul>
Dock Seal	▼		Description	
	SYD-150-10		<ul style="list-style-type: none"> <li>Max door size 8'width x 8'height, 10" projection</li> </ul>	
	SYD-150-20		<ul style="list-style-type: none"> <li>20" projection (for use with SYFM-2072 and SYPE-2072)</li> </ul>	
Dock Traffic System	▼	Size (width x height)	Description	
	SYDTS-5	6½" x 11½"	<ul style="list-style-type: none"> <li>Toggle switch operated</li> <li>25watts</li> <li>115volts</li> </ul>	

 CA PROP 65 WARNING: Cancer/Reproductive Harm [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)

# Loading Dock Accessories

Accesorios para el Muelle de Carga Accessoires pour Chargements de Quai

Molded Rubber Hose & Cable Bridge	▼	Capacity	Size	Description
	SYMRBR-24	2,400lb	24"width x 24"length overall 2¾"width x 1½"height usable channel	
	SYRHCB-12	2,400lb	12"width x 32"length overall 3½"width x 3"height usable channels	Includes one pair of connectors for using multiple units together to form one long bridge
Wheel Chocks	▼	Size (width x height x depth)		Description
	SYBZ11931	4½" x 6" x 8¼"		Plastic, pair
	SYBZ11933	4½" x 6½" x 17¾"		Structural foam
	SYEALUM-7	7" x 8" x 11¾"		Extruded aluminum
	SYFAB-11	10¾" x 8" x 9"		Fabricated steel
	SYLWC-14	9" x 5¾" x 11"		Laminated rubber
	SYLWC-15	10⅝" x 8" x 7⅝"		Laminated rubber

⚠ CA PROP 65 WARNING: Cancer/Reproductive Harm [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)

# Loading Dock Accessories


Accesorios para el Muelle de Carga Accessoires pour Chargements de Quai


Wheel Chocks		▼	Size (width x height x depth)	Description	
	SYMS-15		8 <sup>1</sup> / <sub>16</sub> " x 7 <sup>1</sup> / <sub>8</sub> " x 8 <sup>1</sup> / <sub>4</sub> "	Molded steel	
	SYRWC-8		9 <sup>1</sup> / <sub>4</sub> " x 6" x 8"	Molded rubber	
	SYRWC-8-HDL		9 <sup>1</sup> / <sub>4</sub> " x 6" x 8"	Molded rubber chock (handle)	
	SYURWC-15		8" x 8" x 11"	Molded urethane	
Cargo Strapping		▼	Capacity	Size (width x length)	Description
	SYSTRAP-12-RE		1,000lb	2" x 12'	E-clip type ends
	SYSTRAP-27-FH		3,325lb	2" x 27'	Flat hook
	SYSTRAP-27-RH		3,325lb Working load	2" x 27'	Rod hook
Pallet Puller		▼	Capacity	Size	Description
	SYPAL-12		5,000lb pulling		Single-scissor style
	SYPAL-21		5,000lb pulling		Double-scissor style
	SYPPC-20		6,000lb pulling	Extension chain— 20"length x 1/4"	




 CA PROP 65 WARNING: Cancer/Reproductive Harm [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)


# Loading Dock Accessories

Accesorios para el Muelle de Carga Accessoires pour Chargements de Quai

Dock Light		Size	Description
	SY34250	Adjustable/flexible 42" tube	• Dock 277V US
	SY8553443	Adjustable/flexible 42" tube	• Dock 230V Euro
	SY8553443US	Adjustable/flexible 42" tube	• Dock 115V US


Dock Light (Bulb Not Included)		Size	Description
	SYAR-38-90	Halogen bulb for dock light 90W, 1270lumens	• 115V AC power source required
	SYLL-40	40" dock light	• Dual arm
	SYLL-40ARM	40" double strut arm	
	SYLL-60	60" dock light	
	SYLL-60ARM	60" double strut arm	
	SYLL-BRKT	Mounting bracket, set of 2	

Trailer Stabilizing Jack		Capacity	Size	Description
	SYLO-J	40,000lb lifting 100,000lb static	39" - 51" service range	• Ratchet-style • Use for OSHA compliance
	SYSP-TOP	40,000lb lifting 100,000lb static	39½" - 51" service range	• Spin top style • Use for OSHA compliance
	SYSP-TOP	40,000lb lifting 100,000lb static	39½" - 51" service range	• Spin top style • Use for OSHA compliance
	SYSP-TOP-R	40,000lb lifting 100,000lb static	39" - 51" service range	• Ratchet style • Use for OSHA compliance
	SYSP-TOP-R	40,000lb lifting 100,000lb static	39" - 51" service range	• Ratchet style • Use for OSHA compliance

 CA PROP 65 WARNING: Cancer/Reproductive Harm [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)


# Loading Dock Accessories

Accesorios para el Muelle de Carga Accessoires pour Chargements de Quai

Pry Lever Bar	▼	Capacity	Size	Description	
		SYPLB-5	4,250lb	5' wooden handle	• Two 5" x 2" poly-on-steel wheels
		SYPLB-6	4,250lb	6' wooden handle	• Two 5" x 2" poly-on-steel wheels • Steel nose plate
		SYPLB-7	4,250lb	7' wooden handle	
		SYPLB/S-5	5,000lb	59 <sup>7</sup> / <sub>16</sub> " steel handle	
		SYPLB/S-6	5,000lb	71 <sup>7</sup> / <sub>16</sub> " steel handle	
		SYPLB/S-7	5,000lb	83 <sup>7</sup> / <sub>16</sub> " steel handle	

Dock Bumper, Molded Rubber	▼	Overall Size (width x height x depth)	
		SYB-818	18" x 8" x 2"


		SYB-1224-3	24" x 12" x 3"
-----------------------------------------------------------------------------------	--	------------	----------------

		SYDBE-10	4 <sup>1</sup> / <sub>2</sub> " x 10" x 3"
		SYDBE-20	4 <sup>1</sup> / <sub>2</sub> " x 20" x 3"
		SYDBE-30	4 <sup>1</sup> / <sub>2</sub> " x 30" x 3"

		SYL-1818-4	18" x 18" x 4"
-------------------------------------------------------------------------------------	--	------------	----------------

Dock Bumper, Extruded Rubber	▼	Overall Size (width x length x depth)	
		SYBS-36	5 <sup>1</sup> / <sub>2</sub> " x 36" x 1 <sup>1</sup> / <sub>4</sub> "

		SYM-2-24	2" x 24" x 2"
		SYM-2-36	2" x 36" x 2"

 CA PROP 65 WARNING: Cancer/Reproductive Harm [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)

# Loading Dock Accessories


Accesorios para el Muelle de Carga Accessoires pour Chargements de Quai

## Dock Bumper, Extruded Rubber



	Overall Size (width x length x depth)
SYM-4-24	4" x 24" x 4"
SYM-4-36	4" x 36" x 4"

## Dock Bumper, Laminated Rubber



	Size (height x length x depth)
SY1012-4.5	10" x 12" x 4½"
SY1014-4.5	10" x 14" x 4½"
SY1018-4.5	10" x 18" x 4½"
SY1024-4.5	10" x 24" x 4½"
SY1212-4.5	12" x 12" x 4½"
SY1224-4.5	12" x 24" x 4½"

## Strip Door

- 2/3" overlap
- Header mount
- Clear poly strips
- Optional wall-mount is available
- Special strip style and sizes are available



## Strip Door

- Superposición de 2/3"
- Fijación y montaje de la parte superior
- Tiras transparentes de poliuretanos
- Montaje de pared opcional
- Especiales estilos y tamaños de láminas están disponibles

## Portes à Lamelles

- Chevauchement de 2/3"
- Fixation et montage sur la partie supérieure
- Lamelles claires en Polyuréthanes
- Montage murale disponible en option
- Styles spéciaux et différentes tailles de lamelles sont disponibles

	Door Size (width x height)	Strip Size (width)
SYTG-800-S-H-36-84	36" x 84"	8"
SYTG-800-S-H-48-84	48" x 84"	8"
SYTG-800-S-H-48-96	48" x 96"	8"
SYTG-800-S-H-60-96	60" x 96"	8"

	Door Size (width x height)	Strip Size (width)
SYTG-800-S-H-72-96	72" x 96"	8"
SYTG-800-S-H-96-96	96" x 96"	8"
SYTG-1200-S-H-96-96	96" x 96"	12"
SYTG-1200-S-H-96-120	96" x 120"	12"


CA PROP 65 WARNING: Cancer/Reproductive Harm [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)

# Loading Dock Accessories

Accesorios para el Muelle de Carga Accessoires pour Chargements de Quai



Model SYJR-HL

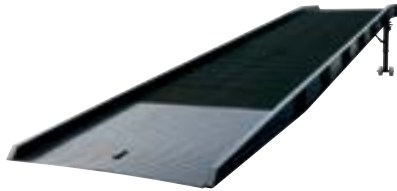


Model SYJR-FS

Steel Yard Ramps ▼	Capacity	Overall Width	Usable Width	Length	Description
SYJR-16-7230	16,000lb	72"	66"	30'	• Load and unload trailers from ground level when no freight dock exists
SYJR-16-7236	16,000lb	72"	66"	36'	
SYJR-16-8430	16,000lb	84"	78"	30'	• Manual two-speed hand crank for easy one person height adjustment
SYJR-16-8436	16,000lb	84"	78"	36'	
SYJR-20-8536	20,000lb	85"	78"	36'	• 9" diameter steel dual wheels
SYJR-FS	Forklift pick-up slots option				• Service range 45" to 62"
SYJR-HL	Pneumatic tire and hand pump hydraulic lift option				• Surface is heavy-duty open steel grating for positive traction
SYJR-HL-DC	Pneumatic tire and dc powered hydraulic lift option				• Steel construction with welding to meet AWS
SYJR-TB	Tow bar loop option				• Overlap style lip is 15" long
SYJR-TB-H	Tow bar hitch option				• 4" high safety curbs
					• Units ship flat bed truck
					• Painted neutral earth-tone brown color

## Aluminum Hand Truck Dockplate

- Lightweight design is ideal for foot or hand truck traffic only
- High-strength aluminum treadplate material is durable yet lightweight
- Zinc-plated locking legs and lifting handles for OSHA compliance
- Beveled entrance and exit edges for smoother transition
- All models ship UPS

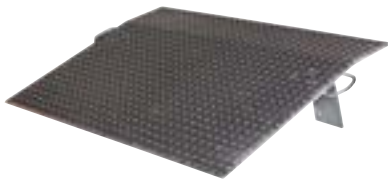

## Carro Manual de Aluminio

- Diseño Ligero ideal sólo para el tráfico a pie
- Material con aluminio de alta resistencia. Material durable y ligero
- Patas y manijas cumplen con regulaciones de OSHA Acabado de Zinc plateado
- Los bordes de entrada y salida biselados para una transición fácil
- Todos los modelos se envían vía UPS

## Débarcadere Manuel en Aluminium.

- Matériau à haute résistance, plaque de roulement en aluminium. Durable et léger
- Verouillage des pieds et poignées de levage zingué conforme aux exigences OSHA
- Bords d'entrées et de sorties en biseau pour faciliter les transitions
- Tous nos modèles sont expédiés via UPS







▼	Capacity	Size (width x height)	Height Differential	Plate Thickness
SYA-3024	500	30" x 24"	3"	1/4"
SYA-3030	500	30" x 30"	4"	1/4"
SYA-3036	500	30" x 36"	5"	1/4"
SYA-3048	500	30" x 48"	7"	1/4"
SYA-3624	500	36" x 24"	3"	1/4"
SYA-3630	500	36" x 30"	4"	1/4"
SYA-3636	500	36" x 36"	5"	1/4"
SYA-3648	500	36" x 48"	7"	1/4"

▼	Capacity	Size (width x height)	Height Differential	Plate Thickness
SYAH-3024	700	30" x 24"	3"	5/16"
SYAH-3030	700	30" x 30"	4"	5/16"
SYAH-3036	700	30" x 36"	5"	5/16"
SYAH-3048	700	30" x 48"	7"	5/16"
SYAH-3624	700	36" x 24"	3"	5/16"
SYAH-3630	700	36" x 30"	4"	5/16"
SYAH-3636	700	36" x 36"	5"	5/16"
SYAH-3648	700	36" x 48"	7"	5/16"

⚠ CA PROP 65 WARNING: Cancer/Reproductive Harm [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)



# Protective Barriers Barreras Protectoras Barrières de Protection

Low Profile Rack Guard	▼	Size	Description
		SYNPG4-24 4"width opening x 24"height	<ul style="list-style-type: none"> <li>Requires only two bolts for quicker installation (not included)</li> <li>Other sizes available</li> <li>Safety yellow</li> </ul>
Rack Guard with Rubber Bumper	▼	Size	Description
		SYRUD-24 4"width opening x 24"height	<ul style="list-style-type: none"> <li>Includes rubber bumper</li> <li>Mounting hardware included; simply bolts to upright—no drilling required</li> </ul>
Steel Safety Bollard	▼	Size (height x depth)	Description
		SYBOL-36-4.5 36" x 4½"	<ul style="list-style-type: none"> <li>Removable rubber top cap</li> <li>Safety yellow</li> </ul>
		SYBOL-42-4.5 42" x 4½"	
		SYBOL-42-5.5 42" x 5½"	
Structural Guard Rail	▼	Size	Description
		SYSTGR-4 Rail - 8"height x 4'length	<ul style="list-style-type: none"> <li>Constructed of structural C-channel</li> <li>Drop in design</li> <li>Powder coat safety yellow finish</li> </ul>
		SYSTGR-6 Railing - 6'length	
		SYSTGR-8 Railing - 8'length	
		SYSTGR-10 Railing - 10'length	
		SYSTGR-12 Railing - 12'length	
		SYSTGR-TP18DI Tubular posts, 18"height single rail	
		SYSTGR-TP42DI Tubular posts, 42"height double rail	
		SYSTGR-TP60DI Tubular posts, 60"height triple rail	
	SYSTGR-TP72DI Tubular posts, 72"height triple rail		
Safe Bumper Forklift Protector	▼	Size	Description
		SY91883 4" x 18" x 1¼"	<ul style="list-style-type: none"> <li>Specifically designed for forklifts, these bumpers reduce damage in many applications</li> <li>Includes 2 magnets, 3M tape, and fork brackets</li> <li>Can bend 90 degrees and able to be installed on corners</li> </ul>
Steel Spring Loaded Bollards	▼	Size (height x depth)	Description
		SYSPBOL-42 42" x 2½"	<ul style="list-style-type: none"> <li>Powder coat finish</li> <li>Powder coat finish</li> <li>With motion activated beeper and strobe</li> <li>Beeper and strobe only</li> </ul>
		SYSPBOL-42-BL 45¼" x 2½"	
		SYSPBOL-BL 2¼" x 5"	

⚠ CA PROP 65 WARNING: Cancer/Reproductive Harm [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)

# Protective Barriers Barreras Protectoras Barrières de Protection

## Structural Guard Rail

Designed to temporarily prohibit access to areas for cleaning or safety concerns. Multiple gates may be connected end-to-end to form longer runs. Heavy-duty construction with painted yellow & black finish. Available in all steel or all aluminum construction.

## Tren de Protección Estructural

Diseñado para impedir temporalmente el acceso a las zonas de limpieza o de seguridad. Los rieles se pueden conectar en los extremos para formar una pista más ancha. Fabricado de material firme con un acabado de pintura amarilla y negra.

## Rail Structurelles de Protection

Conçu pour interdire temporairement l'accès aux zones de nettoyage ou de sécurité. Les rails peuvent être connectés bout à bout pour former un rail plus large. Matériaux robustes avec finition peinture jaune et noir. Disponible en acier et en aluminium.



### Expand-A-Gate - Steel Construction ▼

	Expand Range	Casters	Height	Net Weight
SYEXGATE-30	19¾" – 139"	No	38"	56lb
SYEXGATE-30-C	19¾" – 139"	Yes	40½"	57lb

### Expand-A-Gate - Aluminum Construction ▼

	Expand Range	Casters	Height	Net Weight
SYALEXGATE-30	19¾" – 139"	No	38"	25lb
SYALEXGATE-30-C	19¾" – 139"	Yes	40½"	30lb

## Crowd Control

### Interlocking Barriers ▼

	Finish	Rail Diameter	Net Weight	Description
	Galvanized	1¼"	85lb	<ul style="list-style-type: none"> <li>Lightweight one-piece handrail is attractive and functional. Interlocking portable railing has many commercial and industrial applications</li> <li>Easy to move to meet changing needs</li> </ul>
SYPRAIL-102-G	Galvanized	1¼"	85lb	
	Galvanized	1⅝"	105lb	<ul style="list-style-type: none"> <li>Upright bars are vertically spaced at 5¼" intervals</li> <li>Includes connectors to attach multiple units together to form long runs</li> <li>Overall size is 102" length x 40" height</li> <li>All welded steel construction</li> <li>Suffix-HD denotes heavy duty construction</li> </ul>
SYPRAIL-102-HD-G	Galvanized	1⅝"	105lb	
	Yellow powder coat	1¼"	85lb	
SYPRAIL-102-Y	Yellow powder coat	1¼"	85lb	
	Yellow powder coat	1⅝"	105lb	
SYPRAIL-102-HD-Y	Yellow powder coat	1⅝"	105lb	

## Self-Closing Steel Gates

Customize your safety railings with Self-Closing Steel Gates. Gates can be mounted from the left or right with the included mounting hardware. Mount to horizontal rails that measure up to 2" diameter and are spaced 10" to 21" apart center to center. Choose from galvanized or yellow powder coat finish. Meets OSHA 1910.23a requirements. (Railing and base not included)


## Puertas de Cierre Automáticas

Personalice sus barandas de seguridad de acero. Las puertas se pueden montar del lado izquierdo o lado derecho con la herramienta de montaje incluida. Monte los rieles horizontales que miden hasta 2" de diámetro y que están 10" a 21" de distancia del centro. Elija entre el acabado galvanizado o el amarillo. Cumple el requisito de OSHA 1910.23a.

## Portes à Fermeture Automatique en Acier

Augmentez votre sécurité avec les portes à fermeture automatique en acier. Les portes peuvent être montées à gauche ou à droite avec le matériel de montage inclus. Montez sur rails horizontaux qui mesurent jusqu'à 2 cm de diamètre et sont espacés de 10" à 21" de centre à centre. Choisissez entre un revêtement en poudre galvanisé ou le revêtement en poudre jaune. OSHA 1910.23a exigences. (Rails et base non inclus)

### Self-Closing Steel Gates ▼

	Material	Opening Width	Height	Net Weight
	Galvanized	16" to 26"	12"	30lb
SYSPG-26-G	Galvanized	16" to 26"	12"	30lb
SYSPG-26-Y	Yellow	16" to 26"	12"	30lb
SYSPG-40-G	Galvanized	24" to 40"	12"	35lb
SYSPG-40-Y	Yellow	24" to 40"	12"	35lb

⚠ CA PROP 65 WARNING: Cancer/Reproductive Harm [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)

# Protective Barriers Barreras Protectoras Barrières de Protection

## Pipe Safety Railing

Protect people from uneven walkways and mezzanine drop off's. These durable railings are made of schedule 40 pipe (1 5/8" O.D.). Handrails are 42" high with a 21" midrail. Mounting options include socket sleeves, barricade base or cast steel sockets for convenient handrail removal. The cast steel sockets accept wood 2" x 4" or 2" x 6" when toe boards are required. Steel railing features powder coat safety yellow finish.



## Barandillas de Seguridad

Proteja a las persona de los caminos irregulares y de caídas de entresijos. Estas barandas duraderas están hechas con tubos de la serie 40 (1 5/8" D.E.). Los pasamanos son de 42" de alto. Las opciones de montaje incluyen los tubos y las bases de corriente barricadas o acero fundido para facilitar la eliminación de la barandilla. Los casquillos de acero aceptan madera de 2" x 4" o 2" x 6" cuando se requieren esquinas. Barandillas de acero con acabado en amarillo seguro.

## Garde-Corps de Sécurité






Protège les gens des trottoirs au sol irrégulier et des chutes provenant des mezzanines. Ces gardes-corps sont faits avec des tuyaux de série 40 (1 5/8" O.D.). Les mains courantes sont hautes de 42". Les outils de montage comprennent des douilles en acier, la base de la barricade, et des douilles en acier moulé pour faciliter le retrait des mains courantes. Les douilles en acier moulé supportent du bois de 2" x 4" ou 2" x 6" lorsque des plinthes sont nécessaires. Balustrade en acier finition en poudre jaune.


Pipe Safety Railing - Steel Construction ▼	Top Rail Height	Midrail Height	Length	Outer Diameter	Net Weight
SYVDKR-2	42"	21"	24"	1 5/8"	19lb
SYVDKR-3	42"	21"	36"	1 5/8"	24lb
SYVDKR-4	42"	21"	48"	1 5/8"	28lb
SYVDKR-5	42"	21"	60"	1 5/8"	33lb
SYVDKR-6	42"	21"	72"	1 5/8"	34lb
SYVDKR-7	42"	21"	84"	1 5/8"	36lb
SYVDKR-8	42"	21"	96"	1 5/8"	48lb

Pipe Safety Railing - Aluminum Construction ▼	Top Rail Height	Midrail Height	Length	Outer Diameter	Net Weight
SYADKR-2	42"	21"	24"	1 5/8"	9lb
SYADKR-3	42"	21"	36"	1 5/8"	10lb
SYADKR-4	42"	21"	48"	1 5/8"	12lb
SYADKR-5	42"	21"	60"	1 5/8"	13lb
SYADKR-6	42"	21"	72"	1 5/8"	15lb
SYADKR-7	42"	21"	84"	1 5/8"	16lb
SYADKR-8	42"	21"	96"	1 5/8"	18lb

# Protective Barriers **Barreras Protectoras** Barrières de Protection

Pipe Safety Options ▼		Net Weight	Description
	SYVDKR-BB-F	6lb	Barricade base with feet
	SYVDKR-CON	3lb	Connector kit
	SYVDKR-G3	24lb	Three foot steel gate
	SYVDKR-G4	28lb	Four foot steel gate
	SYVDKR-P107	1lb	4" metal sleeve for mounting in concrete

 CA PROP 65 WARNING: Cancer/Reproductive Harm [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)

# Protective Barriers Barreras Protectoras Barrières de Protection

## Structural Guard Rail

Create a modular system to protect equipment, inventory, and individuals from damage or injury with this highly visible powder coat yellow Structural Guard Rail. Triple ridge corrugated rails are constructed from 1/8" thick material, made for high impact resistance indoors or out. Posts are constructed of round corner 1/4" thick material. The steel base plate measures 10" square and is 5/8" thick. Bolts, anchors, washers, and nuts are provided with individual post sections. Concrete mounting kit is available separately. Provide a strong barrier with easy accessibility with our Drop-In Style rails. Slide rail sections into post saddles for simple assembly. Each Drop-In Style rail section includes two brackets. Bolt-On Style rails are designed for permanent installation.

## Tren de Protección Estructural

Cree un sistema modular para proteger el equipo, el inventario, y los individuos de daños o lesiones con esta capa de polvo altamente visible. Los rieles corrugados Triple Ridge están contruidos con material de 1/8" de grosor, fabricados para una alta resistencia al impacto en interiores o exteriores. La placa base de acero mide 10" cuadrados y es 5/8" de grosor. Los pernos, anclajes, arandelas y tuercas están provistos de secciones de poste individuales. El kit de montaje está disponible por separado. Proporcione una barrera fuerte con la accesibilidad fácil con nuestros carriles del Estilo Drop-In. Destice las secciones del carril en los soportes de los postes para un montaje sencillo. Cada sección del carril de estilo Drop-In incluye dos soportes. Los rieles de estilo en negrita están diseñados para una instalación permanente.

## Rail Structurelles de Protection

Créez un système modulaire pour protéger l'équipement, l'inventaire et les personnes contre les dommages ou blessures avec ces rails à garde structurelles couverte avec peint en poudre. Les rails à rainures triples sont construits à partir d'un matériau de 1/8" d'épaisseur, fabriqué pour une résistance élevée aux chocs à l'intérieur ou à l'extérieur. La plaque de base en acier mesure 10po carré et est 5/8po d'épaisseur. Les boulons, les ancrages, les rondelles et les écrous sont fournis avec les poteaux individuels. Le kit de montage en béton est disponible séparément. Fait une barrière solide avec une accessibilité facile avec nos rails qui installent facilement. Assemble les rails dans les montants pour un montage simple. Chaque section de rail comprend deux supports. Les rails de style "boulon" sont conçus pour une installation permanente.



### Bolt-On Style

- (1) SYGR-B-6 (Shown)
- (1) SYGR-TP18 (Shown)
- (2) SYGR-B-4 (Shown)
- (2) SYGR-TP42 (Shown)



### Drop-In Style

- (2) SYGR-LO-4 (Shown)
- (2) SYGR-TP42 (Shown)



### Series YGR-TP

- SYGR-TP18 (Shown)
- SYGR-TP42 (Not shown)

## Structural Guard Rail Section -

### Drop-In Style (2 brackets included per rail) ▼

	Height	Length	Mounting Posts Required	Net Weight
SYGR-LO-4	15"	48"	2	54lb
SYGR-LO-6	15"	72"	2	74lb
SYGR-LO-8	15"	96"	2	94lb
SYGR-LO-10	15"	120"	2	114lb

### Structural Guard Rail Section - Bolt-On Style ▼

	Height	Length	Mounting Posts Required	Net Weight
SYGR-B-4	15"	48"	2	44lb
SYGR-B-6	15"	72"	2	64lb
SYGR-B-8	15"	96"	2	84lb
SYGR-B-10	15"	120"	3	104lb





## Tubular Posts -

### Used with both drop in and bolt on style ▼


	Height	Length	Mounting Posts Required	Net Weight
SYGR-TP18	18"	Tubular posts		40lb
SYGR-TP42	42"	Tubular posts		65lb

⚠ CA PROP 65 WARNING: Cancer/Reproductive Harm [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)

# Hydraulic Elevating Lifts Levantadores Hidráulicos Tables Elévatrices Hydrauliques

Hydraulic Elevating Cart ▼	Capacity	Platform Size (width x length)	Service Range	Description
 SYCART-400	400lb	17½" x 27½"	8¾" to 29"	Single-speed foot pump
 SYCART-1000-LD	1000lb	31½" x 63"	15" to 36"	Single-speed foot pump
 SYCART-750	750lb	19¾" x 32½"	15½" to 35½"	Two-speed foot pump
 SYCART-800-D	800lb	20" x 35½"	15½" to 51"	Two-speed foot bump


# Lifters/Tilters/Rotators Levantadores/Basculantes/Rotadores Tables Elévatrices


Electric Hydraulic Scissor Lift Tables ▼	Capacity	Platform Size (width x length)	Service Range	Description
	SYEHLT-2448-4-43	4000lb	24" x 48"	7" to 43"
	SYEHLT-3060-4-43	4000lb	30" x 60"	7" to 43"
	SYEHLT-4048-4-43	4000lb	40" x 48"	7" to 43"
	SYEHLT-4848-4-43	4000lb	48" x 48"	7" to 43"
	SYEHLT-4872-4-43	4000lb	48" x 72"	7" to 43"

- 460V/3 phase (other power options are available)
- Hand control

⚠ CA PROP 65 WARNING: Cancer/Reproductive Harm [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)

## Carts Carretas/Plataformas Chariots



Hardwood Platform Truck	▼	Capacity	Deck Size (width x length)	Description	
		SYVHPT-2448	1,600lb	24" x 48"	<ul style="list-style-type: none"> <li>Platform height 9"</li> <li>6" x 2" mold-on rubber</li> <li>Removable push handle</li> </ul>
		SYVHPT-2754	1,600lb	27" x 54"	
		SYVHPT-3060	1,600lb	30" x 60"	
		SYVHPT-3672	1,600lb	36" x 72"	


Easy-Access Stock Truck	▼	Shelf Capacity	Overall Capacity	Shelf Size (width x length)	Description	
		SYEASY-A-1836	660lb	1,200lb	18" x 36"	<ul style="list-style-type: none"> <li>Two shelf design with three support legs</li> <li>Fold down design simplifies assembly</li> <li>Two rigid and two swivel poly casters (with brake)</li> <li>Mount swivel casters in front for lighter applications</li> <li>Mount swivel casters to rear for heavier applications</li> <li>Chrome plated handles</li> <li>Stock truck sold separately</li> </ul>
		SYEASY-A-2436	660lb	1,200lb	24" x 36"	
		SYEASY-A-2448	660lb	1,200lb	24" x 48"	



SYEASY-A-WT

Writing table

Heavy-Duty Ergo-Handle Cart	▼	Cart	Shelf Clearance	Description	
		SYDH-PH4-2436	Two shelf	22"	<ul style="list-style-type: none"> <li>Welded steel construction</li> <li>Removable chrome-plated handle</li> <li>8" x 2" casters with roller bearings</li> <li>Two rigid and two swivel casters</li> <li>Platform size 24" x 36"</li> <li>Phenolic caster</li> <li>4,000lb capacity</li> </ul>
		SYDH-PH4-2448	Two shelf	22"	
		SYDH-PH4-2460	Two shelf	22"	
		SYDH-PH4-2472	Two shelf	22"	
		SYDH-PH4-3448	Two shelf	22"	
		SYDH-PH4-3460	Two shelf	22"	
		SYDH-PH4-3472	Two shelf	22"	
		SYDH-PH4-2436-3	Three shelf	10 <sup>1</sup> / <sub>4</sub> "	
	SYDH-PH4-2448-3	Three shelf	10 <sup>1</sup> / <sub>4</sub> "		

 CA PROP 65 WARNING: Cancer/Reproductive Harm [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)

## Carts Carretas/Plataformas Chariots

### Hand Cart with Foldable Handle



	Overall Size (length x width x height)	Capacity
SYHTT-300	34¼" x 35" x 24¼" 870mm x 890mm x 615mm	660lb 300kg

### Battery Transfer Cart



	Overall Size (length x width x height)	Capacity
SYBTC-CART	33¼" x 50¼" x 37¼"	4,000lb 1814kg

## Industrial Hand Trucks Carros Manuales Diablos Industriels

### Steel Dual Handle



	Capacity	Wheel	Nose Plate	Overall Size (width x depth x height)
SYDHHT-500S	500lb	10" x 3½" Pneumatic wheels	13¾" x 6½"	22½" x 17½" x 44½"
SYDHHT-500S-HR	500lb	10" x 2½" Hard rubber wheels	13¾" x 6½"	21" x 17½" x 44½"

### Aluminum Dual Handle



	Capacity	Wheel	Nose Plate	Overall Size (width x depth x height)
SYDHHT-500A	500lb	10" x 3½" Pneumatic wheels	18" x 7½"	20¼" x 19" x 51¼"
SYDHHT-500A-HR	500lb	10" x 2½" Hard rubber wheels	18" x 7½"	19½" x 19" x 51¼"

### Steel "P" Handle





	Capacity	Wheel	Nose Plate	Overall Size (width x depth x height)
SYSPHT-500S	500lb	10" x 3½" Pneumatic wheels	14" x 7½"	21" x 18" x 52"
SYSPHT-500S-HD-HR	600lb	10" x 2" Hard rubber wheels	20" x 5⅛"	20" x 16¼" x 52"
SYSPHT-600S-IND	600lb	13" x 4" Pneumatic wheels	14" x 7"	22" x 22" x 52"

CA PROP 65 WARNING: Cancer/Reproductive Harm [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)



# Industrial Hand Trucks **Carros Manuales** Diablos Industriels

<b>Aluminum "P" Handle</b> ▼		Capacity	Wheel	Nose Plate	Overall Size (width x depth x height)
	SYAPHT-500A	500/200lb	10" x 3½" Pneumatic wheels	18" x 7½" / 12" x 27"	20½" x 18½" x 52½"
	SYAPHT-500A-HR	500/200lb	10" x 2" Hard rubber wheels	18" x 7½" / 12" x 27"	18½" x 18½" x 52½"
<b>Convertible Hand Trucks</b> ▼		Capacity	Wheel	Nose Plate	Overall Size (width x depth x height)
	SYCAHT-500	500/650lb	10" x 3½" Pneumatic wheels	18" x 7¼"	Aluminum, 20½" x 187/8" x 51½" (hand truck) Aluminum, 20½" x 46½" x 40½" (platform truck)"
	SYDSHT-500-PN	500/500lb	10" x 3½" Pneumatic wheels	14" x 7"	Steel, 20" x 17" x 48" (hand truck) Steel, 22" x 42" x 36" (platform truck)"

⚠ CA PROP 65 WARNING: Cancer/Reproductive Harm [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)

# Steel Warehouse Ladders

## Escaleras de Acero para el Almacén Echelles en Acier pour Entrepôts

### Steel Rolling Warehouse Ladder

- Grip strut or perforated steps
- 58° climb angle
- 350lb capacity
- 2-5 steps have 2 all directional casters, and 2 locking casters
- 6-12 steps have bottom step lock caster
- Step depth is 7" with a top step depth of 14"
- Powder coat blue finish
- Ladders comply with OSHA 1910.29, ANSI A14.7 standards.

### Escalera de Acero para la Bodega

- Escalones perforados
- Ángulo de ascenso de 58°
- Capacidad de 350 lb
- 2-5 escalones tienen (2) ruedas giratorias, y (2) ruedas de bloqueo
- 6-12 escalones tienen rueda de bloqueo de escalón inferior
- La profundidad del paso es de 7" con una profundidad de escalón superior de 14"
- Acabado en pintura de polvo azul
- Las escaleras cumplen con las normas OSHA 1910.29, ANSI A14.7

### Echelle en Acier pour Entrepôt


- Structures de préhension ou marches perforées
- Angle de montée de 58°
- Capacité de 350 lb
- Les dispositifs de 2 à 5 marches ont (2) roulettes directionnelles et (2) roulettes à blocage
- Les dispositifs de 6 à 12 marches ont un système de blocage des roulettes sous la première marche
- La profondeur des marches est de 7 po avec une profondeur de marche supérieure de 14 po
- Finition en revêtement en poudre bleu
- Les échelles sont conformes aux normes OSHA 1910.29, ANSI A14.7

### Ladders - No Handrail



	Step Tread	Number of Steps ▼	Top Step (width x height)	Overall (width x depth x height)
SYLAD-PW-18-2-G-NHR	Gripstrut	2	16 <sup>13</sup> / <sub>16</sub> " x 20"	20 <sup>7</sup> / <sub>8</sub> " x 25 <sup>1</sup> / <sub>16</sub> " x 20"
SYLAD-PW-26-2-G-NHR	Gripstrut	2	23 <sup>9</sup> / <sub>16</sub> " x 20"	27 <sup>5</sup> / <sub>8</sub> " x 25 <sup>1</sup> / <sub>16</sub> " x 20"
SYLAD-PW-26-2-P-NHR	Perforated	2	23 <sup>9</sup> / <sub>16</sub> " x 20"	27 <sup>5</sup> / <sub>8</sub> " x 25 <sup>1</sup> / <sub>16</sub> " x 20"
SYLAD-PW-32-2-G-NHR	Gripstrut	2	30 <sup>1</sup> / <sub>4</sub> " x 20"	34 <sup>5</sup> / <sub>16</sub> " x 25 <sup>1</sup> / <sub>16</sub> " x 20"
SYLAD-PW-32-2-P-NHR	Perforated	2	30 <sup>1</sup> / <sub>4</sub> " x 20"	34 <sup>5</sup> / <sub>16</sub> " x 25 <sup>1</sup> / <sub>16</sub> " x 20"
SYLAD-PW-18-3-G-NHR	Gripstrut	3	16 <sup>13</sup> / <sub>16</sub> " x 30"	20 <sup>7</sup> / <sub>8</sub> " x 31 <sup>9</sup> / <sub>16</sub> " x 30"
SYLAD-PW-18-3-P-NHR	Perforated	3	16 <sup>13</sup> / <sub>16</sub> " x 30"	20 <sup>7</sup> / <sub>8</sub> " x 31 <sup>9</sup> / <sub>16</sub> " x 30"
SYLAD-PW-26-3-G-NHR	Gripstrut	3	23 <sup>9</sup> / <sub>16</sub> " x 30"	27 <sup>5</sup> / <sub>8</sub> " x 31 <sup>9</sup> / <sub>16</sub> " x 30"
SYLAD-PW-26-3-P-NHR	Perforated	3	23 <sup>9</sup> / <sub>16</sub> " x 30"	27 <sup>5</sup> / <sub>8</sub> " x 31 <sup>9</sup> / <sub>16</sub> " x 30"
SYLAD-PW-32-3-G-NHR	Gripstrut	3	30 <sup>1</sup> / <sub>4</sub> " x 30"	34 <sup>5</sup> / <sub>16</sub> " x 31 <sup>9</sup> / <sub>16</sub> " x 30"
SYLAD-PW-32-3-P-NHR	Perforated	3	30 <sup>1</sup> / <sub>4</sub> " x 30"	34 <sup>5</sup> / <sub>16</sub> " x 31 <sup>9</sup> / <sub>16</sub> " x 30"
SYLAD-PW-18-4-G-NHR	Gripstrut	4	16 <sup>13</sup> / <sub>16</sub> " x 40"	20 <sup>7</sup> / <sub>8</sub> " x 38 <sup>5</sup> / <sub>8</sub> " x 40"
SYLAD-PW-18-4-P-NHR	Perforated	4	16 <sup>13</sup> / <sub>16</sub> " x 40"	20 <sup>7</sup> / <sub>8</sub> " x 38 <sup>5</sup> / <sub>8</sub> " x 40"
SYLAD-PW-26-4-G-NHR	Gripstrut	4	23 <sup>9</sup> / <sub>16</sub> " x 40"	27 <sup>5</sup> / <sub>8</sub> " x 38 <sup>5</sup> / <sub>8</sub> " x 40"
SYLAD-PW-26-4-P-NHR	Perforated	4	23 <sup>9</sup> / <sub>16</sub> " x 40"	27 <sup>5</sup> / <sub>8</sub> " x 38 <sup>5</sup> / <sub>8</sub> " x 40"
SYLAD-PW-32-4-G-NHR	Gripstrut	4	30 <sup>1</sup> / <sub>4</sub> " x 40"	34 <sup>5</sup> / <sub>16</sub> " x 38 <sup>5</sup> / <sub>8</sub> " x 40"
SYLAD-PW-32-4-P-NHR	Perforated	4	30 <sup>1</sup> / <sub>4</sub> " x 40"	34 <sup>5</sup> / <sub>16</sub> " x 38 <sup>5</sup> / <sub>8</sub> " x 40"

### Ladders - Handrail Included

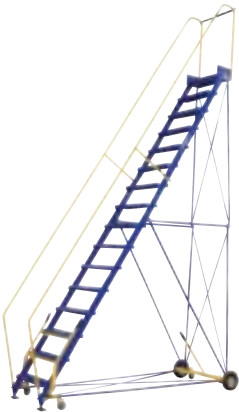


	Step Tread	Number of Steps ▼	Top Step (width x height)	Overall (width x depth x height)
SYLAD-PW-18-2-G	Gripstrut	2	16 <sup>13</sup> / <sub>16</sub> " x 20"	20 <sup>7</sup> / <sub>8</sub> " x 34 <sup>1</sup> / <sub>16</sub> " x 50"
SYLAD-PW-18-2-P	Perforated	2	16 <sup>13</sup> / <sub>16</sub> " x 20"	20 <sup>7</sup> / <sub>8</sub> " x 34 <sup>1</sup> / <sub>16</sub> " x 50"
SYLAD-PW-26-2-G	Gripstrut	2	23 <sup>9</sup> / <sub>16</sub> " x 20"	27 <sup>5</sup> / <sub>8</sub> " x 34 <sup>1</sup> / <sub>16</sub> " x 50"
SYLAD-PW-26-2-P	Perforated	2	23 <sup>9</sup> / <sub>16</sub> " x 20"	27 <sup>5</sup> / <sub>8</sub> " x 34 <sup>1</sup> / <sub>16</sub> " x 50"
SYLAD-PW-32-2-G	Gripstrut	2	30 <sup>1</sup> / <sub>4</sub> " x 20"	34 <sup>5</sup> / <sub>16</sub> " x 34 <sup>1</sup> / <sub>16</sub> " x 50"
SYLAD-PW-32-2-P	Perforated	2	30 <sup>1</sup> / <sub>4</sub> " x 20"	34 <sup>5</sup> / <sub>16</sub> " x 34 <sup>1</sup> / <sub>16</sub> " x 50"
SYLAD-PW-18-3-G	Gripstrut	3	16 <sup>13</sup> / <sub>16</sub> " x 30"	20 <sup>7</sup> / <sub>8</sub> " x 34 <sup>5</sup> / <sub>16</sub> " x 60"
SYLAD-PW-18-3-P	Perforated	3	16 <sup>13</sup> / <sub>16</sub> " x 30"	20 <sup>7</sup> / <sub>8</sub> " x 34 <sup>5</sup> / <sub>16</sub> " x 60"
SYLAD-PW-26-3-G	Gripstrut	3	23 <sup>9</sup> / <sub>16</sub> " x 30"	27 <sup>5</sup> / <sub>8</sub> " x 34 <sup>5</sup> / <sub>16</sub> " x 60"
SYLAD-PW-26-3-P	Perforated	3	23 <sup>9</sup> / <sub>16</sub> " x 30"	27 <sup>5</sup> / <sub>8</sub> " x 34 <sup>5</sup> / <sub>16</sub> " x 60"
SYLAD-PW-32-3-G	Gripstrut	3	30 <sup>1</sup> / <sub>4</sub> " x 30"	34 <sup>5</sup> / <sub>16</sub> " x 34 <sup>5</sup> / <sub>16</sub> " x 60"
SYLAD-PW-32-3-P	Perforated	3	30 <sup>1</sup> / <sub>4</sub> " x 30"	34 <sup>5</sup> / <sub>16</sub> " x 34 <sup>5</sup> / <sub>16</sub> " x 60"
SYLAD-PW-18-4-G	Gripstrut	4	16 <sup>13</sup> / <sub>16</sub> " x 40"	20 <sup>7</sup> / <sub>8</sub> " x 40 <sup>7</sup> / <sub>16</sub> " x 70"
SYLAD-PW-18-4-P	Perforated	4	16 <sup>13</sup> / <sub>16</sub> " x 40"	20 <sup>7</sup> / <sub>8</sub> " x 40 <sup>7</sup> / <sub>16</sub> " x 70"
SYLAD-PW-26-4-G	Gripstrut	4	23 <sup>9</sup> / <sub>16</sub> " x 40"	27 <sup>5</sup> / <sub>8</sub> " x 40 <sup>7</sup> / <sub>16</sub> " x 70"
SYLAD-PW-26-4-P	Perforated	4	23 <sup>9</sup> / <sub>16</sub> " x 40"	27 <sup>5</sup> / <sub>8</sub> " x 40 <sup>7</sup> / <sub>16</sub> " x 70"
SYLAD-PW-32-4-G	Gripstrut	4	30 <sup>1</sup> / <sub>4</sub> " x 40"	34 <sup>5</sup> / <sub>16</sub> " x 40 <sup>7</sup> / <sub>16</sub> " x 70"
SYLAD-PW-32-4-P	Perforated	4	30 <sup>1</sup> / <sub>4</sub> " x 40"	34 <sup>5</sup> / <sub>16</sub> " x 40 <sup>7</sup> / <sub>16</sub> " x 70"
SYLAD-PW-18-5-G	Gripstrut	5	16 <sup>13</sup> / <sub>16</sub> " x 50"	20 <sup>7</sup> / <sub>8</sub> " x 47 <sup>5</sup> / <sub>16</sub> " x 80"
SYLAD-PW-18-5-P	Perforated	5	16 <sup>13</sup> / <sub>16</sub> " x 50"	20 <sup>7</sup> / <sub>8</sub> " x 47 <sup>5</sup> / <sub>16</sub> " x 80"
SYLAD-PW-26-5-G	Gripstrut	5	23 <sup>9</sup> / <sub>16</sub> " x 50"	27 <sup>5</sup> / <sub>8</sub> " x 47 <sup>5</sup> / <sub>16</sub> " x 80"

⚠ CA PROP 65 WARNING: Cancer/Reproductive Harm www.p65warnings.ca.gov

# Steel Warehouse Ladders

Escaleras de Acero para el Almacén Echelles en Acier pour Entrepôts

Ladders - Handrail Included	Step Tread	Number of Steps ▼	Top Step (width x height)	Overall (width x depth x height)
SYLAD-PW-26-5-P	Perforated	5	23 <sup>9</sup> / <sub>16</sub> " x 50"	27 <sup>5</sup> / <sub>8</sub> " x 47 <sup>5</sup> / <sub>16</sub> " x 80"
SYLAD-PW-32-5-G	Gripstrut	5	30 <sup>1</sup> / <sub>4</sub> " x 50"	34 <sup>5</sup> / <sub>16</sub> " x 47 <sup>5</sup> / <sub>16</sub> " x 80"
SYLAD-PW-32-5-P	Perforated	5	30 <sup>1</sup> / <sub>4</sub> " x 50"	34 <sup>5</sup> / <sub>16</sub> " x 47 <sup>5</sup> / <sub>16</sub> " x 80"
SYLAD-PW-18-6-G	Gripstrut	6	16 <sup>13</sup> / <sub>16</sub> " x 60"	23 <sup>13</sup> / <sub>16</sub> " x 50 <sup>1</sup> / <sub>8</sub> " x 90"
SYLAD-PW-18-6-P	Perforated	6	16 <sup>13</sup> / <sub>16</sub> " x 60"	25 <sup>1</sup> / <sub>2</sub> " x 50 <sup>1</sup> / <sub>8</sub> " x 90"
SYLAD-PW-26-6-G	Gripstrut	6	23 <sup>9</sup> / <sub>16</sub> " x 60"	29 <sup>3</sup> / <sub>4</sub> " x 50 <sup>3</sup> / <sub>16</sub> " x 90"
SYLAD-PW-26-6-P	Perforated	6	23 <sup>9</sup> / <sub>16</sub> " x 60"	29 <sup>3</sup> / <sub>4</sub> " x 50 <sup>3</sup> / <sub>16</sub> " x 90"
SYLAD-PW-32-6-G	Gripstrut	6	30 <sup>1</sup> / <sub>4</sub> " x 60"	38 <sup>15</sup> / <sub>16</sub> " x 50 <sup>1</sup> / <sub>8</sub> " x 90"
SYLAD-PW-32-6-P	Perforated	6	30 <sup>1</sup> / <sub>4</sub> " x 60"	38 <sup>15</sup> / <sub>16</sub> " x 50 <sup>1</sup> / <sub>8</sub> " x 90"
SYLAD-PW-18-7-G	Gripstrut	7	16 <sup>13</sup> / <sub>16</sub> " x 70"	23 <sup>13</sup> / <sub>16</sub> " x 56 <sup>1</sup> / <sub>4</sub> " x 100"
SYLAD-PW-18-7-P	Perforated	7	16 <sup>13</sup> / <sub>16</sub> " x 70"	25 <sup>1</sup> / <sub>2</sub> " x 56 <sup>1</sup> / <sub>4</sub> " x 100"
SYLAD-PW-26-7-G	Gripstrut	7	23 <sup>9</sup> / <sub>16</sub> " x 70"	29 <sup>3</sup> / <sub>4</sub> " x 56 <sup>5</sup> / <sub>16</sub> " x 100"
SYLAD-PW-26-7-P	Perforated	7	23 <sup>9</sup> / <sub>16</sub> " x 70"	29 <sup>3</sup> / <sub>4</sub> " x 56 <sup>5</sup> / <sub>16</sub> " x 100"
SYLAD-PW-32-7-G	Gripstrut	7	30 <sup>1</sup> / <sub>4</sub> " x 70"	38 <sup>15</sup> / <sub>16</sub> " x 56 <sup>1</sup> / <sub>4</sub> " x 100"
SYLAD-PW-32-7-P	Perforated	7	30 <sup>1</sup> / <sub>4</sub> " x 70"	38 <sup>15</sup> / <sub>16</sub> " x 56 <sup>1</sup> / <sub>4</sub> " x 100"
SYLAD-PW-26-8-G	Gripstrut	8	23 <sup>9</sup> / <sub>16</sub> " x 80"	29 <sup>3</sup> / <sub>4</sub> " x 63 <sup>3</sup> / <sub>16</sub> " x 110"
SYLAD-PW-26-8-P	Perforated	8	23 <sup>9</sup> / <sub>16</sub> " x 80"	29 <sup>3</sup> / <sub>4</sub> " x 63 <sup>3</sup> / <sub>16</sub> " x 110"
SYLAD-PW-32-8-G	Gripstrut	8	30 <sup>1</sup> / <sub>4</sub> " x 80"	38 <sup>15</sup> / <sub>16</sub> " x 63 <sup>3</sup> / <sub>16</sub> " x 110"
SYLAD-PW-32-8-P	Perforated	8	30 <sup>1</sup> / <sub>4</sub> " x 80"	38 <sup>15</sup> / <sub>16</sub> " x 63 <sup>3</sup> / <sub>16</sub> " x 110"
SYLAD-PW-26-9-G	Gripstrut	9	23 <sup>9</sup> / <sub>16</sub> " x 90"	29 <sup>3</sup> / <sub>4</sub> " x 68 <sup>15</sup> / <sub>16</sub> " x 120"
SYLAD-PW-26-9-P	Perforated	9	23 <sup>9</sup> / <sub>16</sub> " x 90"	29 <sup>3</sup> / <sub>4</sub> " x 68 <sup>15</sup> / <sub>16</sub> " x 120"
SYLAD-PW-32-9-G	Gripstrut	9	30 <sup>1</sup> / <sub>4</sub> " x 90"	38 <sup>15</sup> / <sub>16</sub> " x 68 <sup>7</sup> / <sub>8</sub> " x 120"
SYLAD-PW-32-9-P	Perforated	9	30 <sup>1</sup> / <sub>4</sub> " x 90"	38 <sup>15</sup> / <sub>16</sub> " x 68 <sup>7</sup> / <sub>8</sub> " x 120"
SYLAD-PW-26-10-G	Gripstrut	10	23 <sup>9</sup> / <sub>16</sub> " x 100"	30 <sup>9</sup> / <sub>16</sub> " x 75 <sup>1</sup> / <sub>8</sub> " x 130"
SYLAD-PW-26-10-P	Perforated	10	23 <sup>9</sup> / <sub>16</sub> " x 100"	32 <sup>1</sup> / <sub>4</sub> " x 75 <sup>1</sup> / <sub>8</sub> " x 130"
SYLAD-PW-32-10-G	Gripstrut	10	30 <sup>1</sup> / <sub>4</sub> " x 100"	38 <sup>15</sup> / <sub>16</sub> " x 75 <sup>1</sup> / <sub>8</sub> " x 130"
SYLAD-PW-32-10-P	Perforated	10	30 <sup>1</sup> / <sub>4</sub> " x 100"	38 <sup>15</sup> / <sub>16</sub> " x 75 <sup>1</sup> / <sub>8</sub> " x 130"
SYLAD-PW-26-11-G	Gripstrut	11	23 <sup>9</sup> / <sub>16</sub> " x 110"	33 <sup>9</sup> / <sub>16</sub> " x 81 <sup>3</sup> / <sub>8</sub> " x 140"
SYLAD-PW-26-11-P	Perforated	11	23 <sup>9</sup> / <sub>16</sub> " x 110"	33 <sup>9</sup> / <sub>16</sub> " x 81 <sup>3</sup> / <sub>8</sub> " x 140"
SYLAD-PW-32-11-G	Gripstrut	11	30 <sup>1</sup> / <sub>4</sub> " x 110"	38 <sup>15</sup> / <sub>16</sub> " x 81 <sup>3</sup> / <sub>8</sub> " x 140"
SYLAD-PW-32-11-P	Perforated	11	30 <sup>1</sup> / <sub>4</sub> " x 110"	38 <sup>15</sup> / <sub>16</sub> " x 81 <sup>3</sup> / <sub>8</sub> " x 140"
SYLAD-PW-26-12-G	Gripstrut	12	23 <sup>9</sup> / <sub>16</sub> " x 120"	33 <sup>9</sup> / <sub>16</sub> " x 87 <sup>5</sup> / <sub>8</sub> " x 156"
SYLAD-PW-26-12-P	Perforated	12	23 <sup>9</sup> / <sub>16</sub> " x 120"	33 <sup>9</sup> / <sub>16</sub> " x 87 <sup>5</sup> / <sub>8</sub> " x 156"
SYLAD-PW-32-12-G	Gripstrut	12	30 <sup>1</sup> / <sub>4</sub> " x 120"	38 <sup>15</sup> / <sub>16</sub> " x 87 <sup>5</sup> / <sub>8</sub> " x 156"
SYLAD-PW-32-12-P	Perforated	12	30 <sup>1</sup> / <sub>4</sub> " x 120"	38 <sup>15</sup> / <sub>16</sub> " x 87 <sup>5</sup> / <sub>8</sub> " x 156"

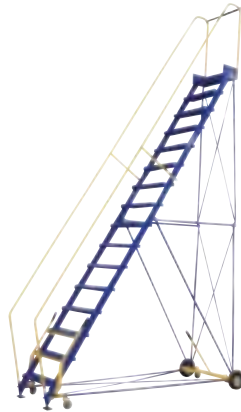

Commercial Spring Loaded Ladders ▼	Capacity	Number of Steps	Top Step Height	Description
SYLAD-1-*	300lb	1	9 <sup>1</sup> / <sub>2</sub> "	<ul style="list-style-type: none"> <li>All directional spring loaded swivel casters</li> <li>Colors available yellow, blue and white</li> </ul>
SYLAD-2-*	300lb	2	18 <sup>1</sup> / <sub>2</sub> "	
SYLAD-3-*	300lb	3	28 <sup>1</sup> / <sub>16</sub> "	
SYLAD-4-*	300lb	4	38 <sup>3</sup> / <sub>16</sub> "	
SYLAD-5-*	300lb	5	47 <sup>1</sup> / <sub>16</sub> "	






\*Add suffix for color choice: (Y)Yellow, (B) Blue and (W) White


\*(B) Blue unavailable for SYLAD-5


⚠ CA PROP 65 WARNING: Cancer/Reproductive Harm www.p65warnings.ca.gov

## Hi-Rise Lift Trucks Transpaletas para Alta Elevación Transpalettes à Haute Levée


Economy Portable High-Riser Skid Lifters		Steel	Operation	Fork Size (width x length)	Description
	SYL-220-HD	Painted	Hand pump	20½" x 43"	<ul style="list-style-type: none"> <li>• Designed for use with skids and pallets without an understructure</li> <li>• Front rollers and two swivel casters in rear to allow easy portability</li> <li>• Service range 3½" to 31½"</li> <li>• Constructed of steel</li> <li>• 2,000 - 3,000lb capacity</li> </ul>
	SYL-270-HD	Painted	Hand pump	26¾" x 43"	
	SYL-220-DC-HD	Painted	12VDC power	20" x 45"	
	SYL-270-DC-HD	Painted	12VDC power	27" x 45"	
	SYL-270-HD-SS	Stainless	Hand pump	26¾" x 43"	

## Manual Hoists Alzamiento de Cadena Manual Palans Manuels à Chaîne

Economy Lever Hoist	Capacity ▼	Lift	Description	
	SYELH-05-5	500lb	5'	<ul style="list-style-type: none"> <li>• Alloy steel chain rated grade 80</li> </ul>
	SYELH-15-5	1,500lb	5'	<ul style="list-style-type: none"> <li>• Drop forged hooks have durable latches and swivel 360°</li> </ul>
	SYELH-15-10	1,500lb	10'	<ul style="list-style-type: none"> <li>• Deformation indicators on throat opening of both hooks</li> </ul>
	SYELH-15-20	1,500lb	20'	
	SYELH-30-5	3,000lb	5'	<ul style="list-style-type: none"> <li>• Completely enclosed Weston type brake mechanism</li> </ul>
	SYELH-30-10	3,000lb	10'	
	SYELH-30-20	3,000lb	20'	<ul style="list-style-type: none"> <li>• One year no questions asked repair or replace</li> </ul>
	SYELH-60-5	6,000lb	5'	<ul style="list-style-type: none"> <li>• Meets ASME B30.21 specifications</li> <li>• Rugged storage bag included FREE with each purchase of units with a capacity under 6,000lb</li> </ul>
	SYELH-60-10	6,000lb	10'	
	SYELH-60-20	6,000lb	20'	

Professional Lever Hoist	Capacity ▼	Lift	Description	
	SYPLH-15-5	1,500lb	5'	<ul style="list-style-type: none"> <li>• Alloy steel chain rated grade 100</li> </ul>
	SYPLH-15-10	1,500lb	10'	<ul style="list-style-type: none"> <li>• Drop forged hooks have durable latches and swivel 360°</li> </ul>
	SYPLH-15-20	1,500lb	20'	
	SYPLH-30-5	3,000lb	5'	<ul style="list-style-type: none"> <li>• Deformation indicators on throat opening of both hooks</li> </ul>
	SYPLH-30-10	3,000lb	10'	
	SYPLH-30-20	3,000lb	20'	<ul style="list-style-type: none"> <li>• 50% wider hardened ratchet gear and precision bearings</li> </ul>
	SYPLH-60-5	6,000lb	5'	<ul style="list-style-type: none"> <li>• Triple chain guide for consistent up and down free wheeling with one hand</li> <li>• Manufactured to ISO-9002 quality standard</li> <li>• Rugged storage bag included FREE with each purchase of units with a capacity under 6,000lb</li> </ul>
	SYPLH-60-10	6,000lb	10'	
	SYPLH-60-20	6,000lb	20"	

## Gantry Cranes Grúas Pórtico Portiques

Quick-Install Manual Trolley	Capacity ▼	Fits Beam Flange	Weight	Description
	SYQIT-1	1,000lb	3" to 5"	<ul style="list-style-type: none"> <li>• Manual adjusting screw with locking collar for quick and easy width adjustment</li> </ul>
	SYQIT-2	2,000lb	3" to 5"	
	SYQIT-4	4,000lb	3" to 7½"	<ul style="list-style-type: none"> <li>• Machined roller with sealed ball bearings</li> </ul>
	SYQIT-6	6,000lb	3" to 7½"	
	SYQIT-8	8,000lb	4" to 11¾"	<ul style="list-style-type: none"> <li>• Heavy-duty steel construction with blue painted finish</li> </ul>

⚠ CA PROP 65 WARNING: Cancer/Reproductive Harm [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)

# Cylinder Handling

## Equipo de Manipulación de Cilindros Equipement pour Manutention de Cylindres

### Wall Mounted Cylinder Brackets



Simple design is easy to install, simply bolt to wall and then secure cylinder with strap. Choose either steel or molded plastic construction.

### Soportes de Cilindros Montados a la Pared

Con su diseño simple facilita la instalación. Simplemente atornillelo a la pared y después asegure el cilindro con la correa. Escoja una fabricación de acero o de plástico.

### Supports Mural pour Réservoirs

Avec son design simple il est facile à installer, il vous suffit de positionner des boulons au mur, puis de fixer le réservoir avec la courroie. Choisissez soit un support en acier ou en plastique moulé.

	▼	Accommodates Cylinders	Net Weight
	SYCB-W-P	1	1lb
			
	SYCB-W-S	1	2lb
			
	SYCB-W-2P	2	2lb
			
	SYCB-W-2S	2	7lb
			
	SYCB-W-3S	3	10lb
			

### Cylinder Tilt Back Hand Truck

Ideal for transporting cylinders from storage to work space. Chains and contoured back cradle provide utmost safety. Tilt back design for effortless transportation.

### Carro de Inclinación para Cilindros

Ideal para el transporte de cilindros del centro de almacenamiento hacia el lugar de trabajo. Las cadenas y los contornos redondeados proporcionan la máxima seguridad. Los sillones reclinables están diseñados para el transporte sin algún esfuerzo.

### Diabie pour Réservoirs Inclinable

Idéal pour transporter des fûts du dépôt au lieu de travail. Les chaînes et l'arrière arrondi épousant les formes des fûts fournissent une manutention toute en sécurité. Les diables inclinables sont conçus pour un transport sans efforts.





▼	Caster Size	Net Weight
SYCYHT-350	10" x 2"	84lb

⚠ CA PROP 65 WARNING: Cancer/Reproductive Harm [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)

# Cylinder Handling

Equipo de Manipulación de Cilindros Equipement pour Manutention de Cylindres

Fork Truck LP Tank Storage	Storage Capacity	Accommodates Cylinders	Size (width x length x height)	Net Weight	Description
	6 vertical	12 <sup>1</sup> / <sub>2</sub> " dia x 28"h	38 <sup>1</sup> / <sub>4</sub> " x 39 <sup>1</sup> / <sub>8</sub> " x 29"	258	<ul style="list-style-type: none"> <li>Made of all steel construction</li> <li>Holds up to 6 LP tanks that are up to 12<sup>1</sup>/<sub>2</sub>" in diameter</li> <li>Safety chains to hold the tanks in place</li> </ul>
					<ul style="list-style-type: none"> <li>Caster option available</li> <li>Four (4) poly casters, (2) swivel with lock, (2) rigid</li> </ul>

## LP Tank Truck


Finally an easy answer to lifting, storing and transporting problems associated with LP tanks. This all-in-one cart will allow the user to transport LP tanks to the location they are needed. The built-in crane can be used to safely load full tanks into fork trucks. The crane pivots 360° for maximum versatility. The crane boom is raised and lowered with a manual hand pump hydraulic lift. The tank attachment at the end of the boom automatically clamps to each end of the cylinder. The built-in racks are ideal for LP tank storage, storing two tanks in the vertical position and four tanks in the horizontal position. Each unit includes a push handle with two rigid and two swivel casters for easy portability. Heavy-duty welded steel construction with a painted finish.


## Carros para Tanques de gas LP

Finalmente hay una respuesta rápida y fácil para sus problemas de elevación, almacenamiento y transportación de los tanques de gas LP. Este carro hace todo, permitiéndole transportar los tanques de gas LP al lugar que necesite. La grúa integrada se puede utilizar para cargar los tanques a las carretillas elevadoras. La grúa gira 360° para una máxima versatilidad. El brazo de la grúa se levanta y se baja con una bomba hidráulica. La fijación de tanque al extremo del brazo automáticamente abraza los extremos de cada cilindro. Los estantes integrados son ideales para el almacenamiento de los tanques de gas LP--ponga dos tanques en posición vertical y cuatro tanques en posición horizontal. Cada unidad incluye una barra de empuje con dos ruedas fijas y dos ruedas giratorias para facilitar el transporte robusto. Hecho de acero sólido con un acabado de pintura.

## Diable pour Réservoirs GPL

Finalmente une réponse de qualité à vos problèmes de levage, stockage et transports de réservoirs GPL. Ce chariot tout en un permet à l'utilisateur de transporter les réservoirs de GPL où ils sont nécessaires. La grue intégrée peut être utilisée pour le chargement des réservoirs sur les chariots à fourches. La grue pivote à 360° pour un maximum de polyvalence. La flèche de grue est levée et abaissée avec une pompe manuelle de levage hydraulique. La fixation du réservoir à la fin de la flèche s'accroche automatiquement à chaque extrémité du réservoir. Les étagères intégrées sont idéales pour le stockage des réservoirs GPL - positionnez deux réservoirs en position verticale et quatre réservoirs en position horizontale. Chaque unité comprend une barre de poussée avec deux roulettes fixes et deux roulettes pivotantes pour un transport facilité. Construction robuste en acier soudé avec une finition peinture.

	Storage Capacity	Overall Size (width x length x height)	Casters	Net Weight
	6 tanks	33 <sup>13</sup> / <sub>16</sub> " x 137 <sup>9</sup> / <sub>16</sub> " x 97 <sup>11</sup> / <sub>16</sub> "	8" x 2" glass filled nylon	775lb

 CA PROP 65 WARNING: Cancer/Reproductive Harm [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)